

## LORO-X COMPOSITE BRANCH 45 DEGREE

## DN 70/70

LORO-Composite pipe branch 45 degrees DN 70/70

### Opis

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN70




### Dane artykułu

|                            |                             |
|----------------------------|-----------------------------|
| Kod EAN                    | 4038088024911               |
| Klasa ETIM                 | EC003025                    |
| Średnica nominalna         | DN 70, DN 70                |
| Długość/stożek nominalny   | 45                          |
| Wymiary zewnętrzne (WxSxD) | 102 x 207 x 255 mm          |
| Waga                       | 2,70 Kg (STK)               |
| Grupa produktów            | 3                           |
| Numer taryfy celnej        | 73089098                    |
| Materiał / Kolor           | Stahl feuerverzinkt, Silber |

### Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

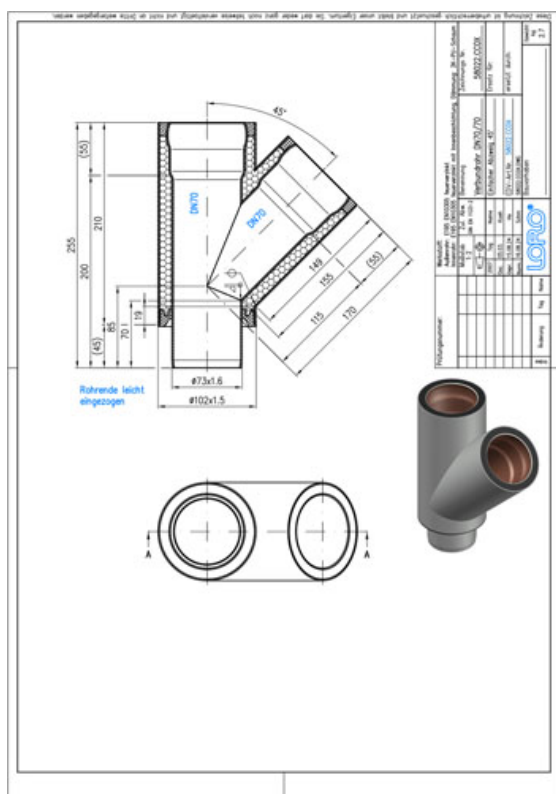

### Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Broszura \(PDF\)](#)

[BIM 3D \(STEP\)](#)