

LORO-X COMPOSITE BRANCH 45 DEGREE

DN 70/70

LORO-Composite pipe branch 45 degrees DN 70/70

Popis

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN70




Údaje o artiklu

EAN kód	4038088024911
ETIM třída	EC003025
Jmenovitý průměr	DN 70, DN 70
Jmenovitá délka/stupeň	45
Vnější rozměry (VxŠxD)	102 x 207 x 255 mm
Hmotnost	2,70 Kg (STK)
Skupina produktů	3
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

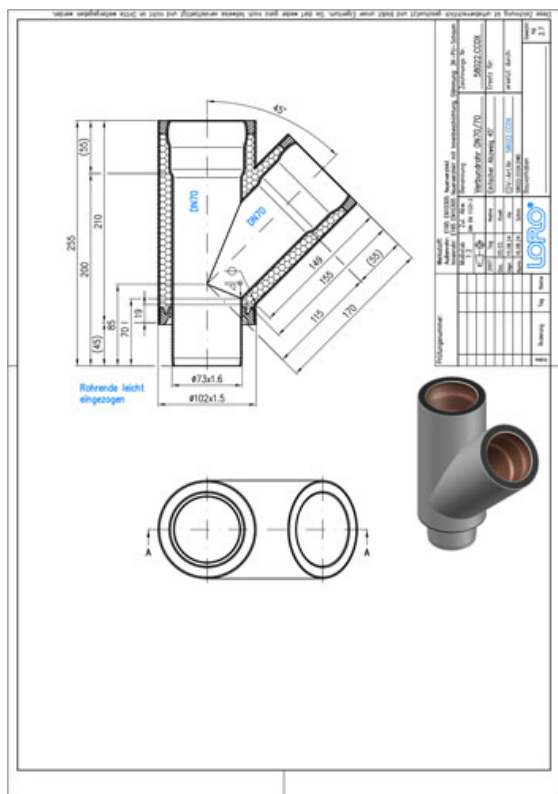

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)