

## LORO-X COMPOSITE BRANCH 45 DEGREE

DN 125/125

LORO-Composite pipe branch 45 degrees DN 125/125

### Descriere

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN125




### Date articol

|                               |                             |
|-------------------------------|-----------------------------|
| Cod EAN                       | 4038088024935               |
| Clasă ETIM                    | EC003025                    |
| Diametru nominal              | DN 125, DN 125              |
| Lungime/grad nominal          | 45                          |
| Dimensiuni exterioare (ÎxLxA) | 168 x 345 x 415 mm          |
| Greutate                      | 13,10 Kg (STK)              |
| Grupă de produse              | 3                           |
| Număr tarif vamal             | 73089098                    |
| Material / Culoare            | Stahl feuerverzinkt, Silber |

### Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

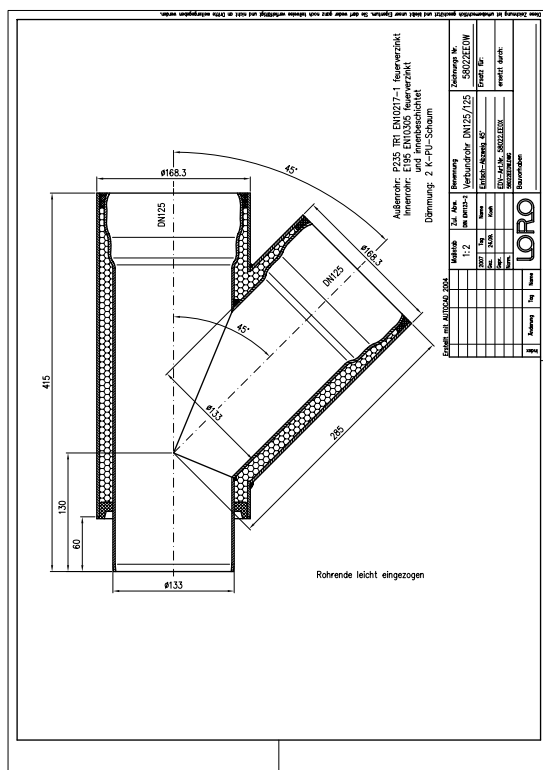

### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)

[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)