LORO-X COMPOSITE BRANCH 45 DEGREE DN 150/150

LORO-Composite pipe branch 45 degrees DN 150/150

Beskrivelse

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN150

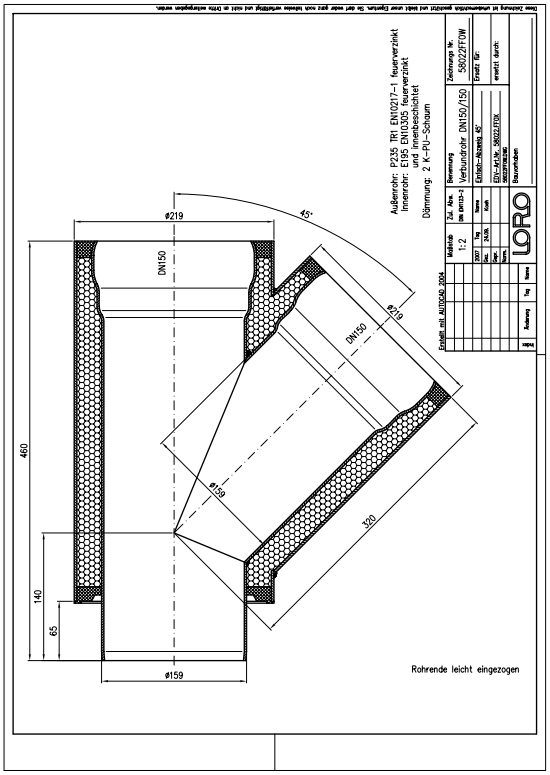

Artikeldata

EAN-kode	4038088024942
ETIM Klasse	EC003025
Nominel diameter	DN 150, DN 150
Nominel længde/grad	45
Ydermål (HxBxL)	219 x 413 x 460 mm
Vægt	16,10 Kg (STK)
Produktgruppe	3
Toldtarifnummer	73089098
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Downloads

Installationsvejledning (PDF)
Måltegning (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online