LORO-X COMPOSITE REDUCED BRANCH 87 DEGREE DN 70/50

LORO-Composite Pipe Red. branch 87 degrees DN 70/50

Description

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 87 degrees, DN70/50

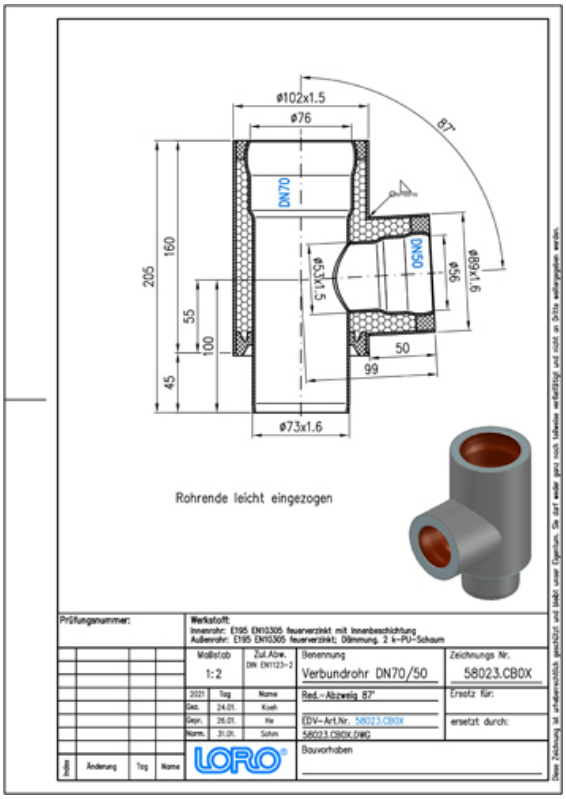

Article information

EAN Code	4038088024959
ETIM Class	EC003025
Nominal diameter	DN 70, DN 50
Nominal length/degree	87
Outside measurements (HxWxL)	102 x 152 x 205 mm
Weight	3,00 Kg (STK)
Product group	3
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Downloads

Alles online

Installation (PDF)
CAD drawing (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)