

LORO-X COMPOSITE REDUCED BRANCH 87 DEGREE DN 70/50

LORO-Composite Pipe Red. branch 87 degrees DN 70/50

Beschrijving

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 87 degrees, DN70/50




Artikelgegevens

EAN-code	4038088024959
ETIM Klasse	EC003025
Nominale diameter	DN 70, DN 50
Nominale lengte/graad	87
Buitenafmetingen (HxBxL)	102 x 152 x 205 mm
Gewicht	3,00 Kg (STK)
Productgroep	3
Douanetariefnumme	73089098
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

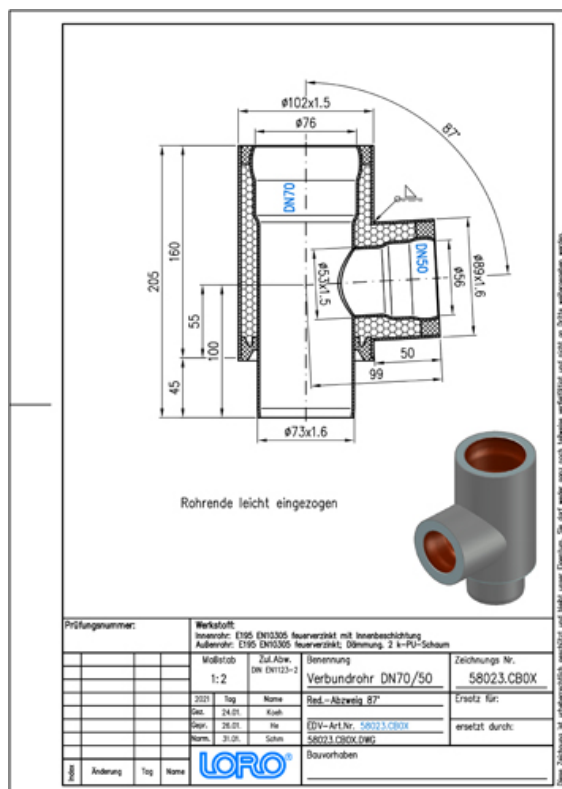

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Maattekening \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)