

LORO-X COMPOSITE REDUCED BRANCH 88 DEGREE DN 100/50

LORO-Composite Pipe Red. branch 87 degrees DN 100/50

Περιγραφή

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 87 degrees, DN100/50




Στοιχεία προϊόντος

Κωδικός EAN	4038088024966
Κατηγορία ETIM	EC003025
Ονομαστική διάμετρος	DN 100, DN 50
Ονομαστικό μήκος/μोίρες	88
Εξωτερικές διαστάσεις (ΥxΠxΜ)	133 x 194 x 260 mm
Βάρος	3,60 Kg (STK)
Ομάδα προϊόντων	3
Δασμολογικός αριθμός	73089098
Υλικό / Χρώμα	Stahl feuerverzinkt, Silber

Σημείωση χρήσης

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

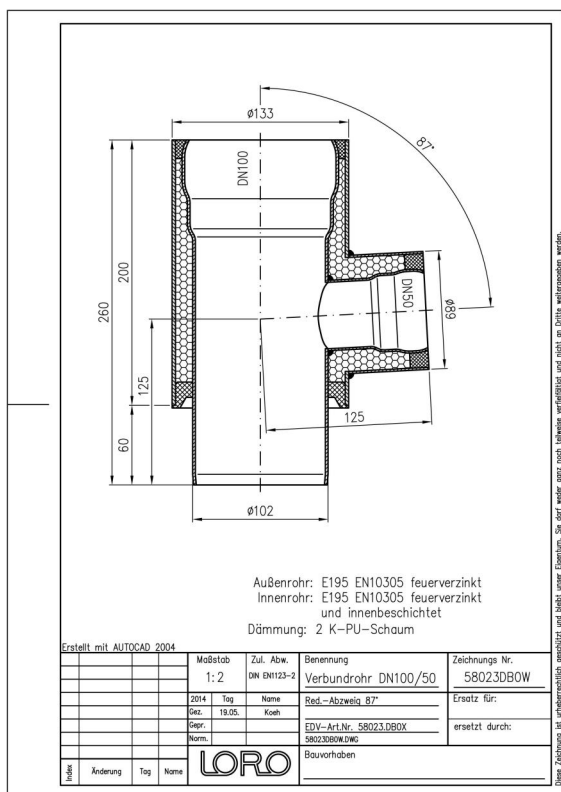

Λήψεις



Alles online

[Οδηγίες εγκατάστασης \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Σχέδιο διαστάσεων \(PDF\)](#)
[CAD \(DWG\)](#)

[Φυλλάδιο \(PDF\)](#)