LORO-X COMPOSITE REDUCED BRANCH 88 DEGREE DN 150/100

LORO-Composite Pipe Red. branch 87 degrees DN 150/100

Description

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 87 degrees, DN150/100

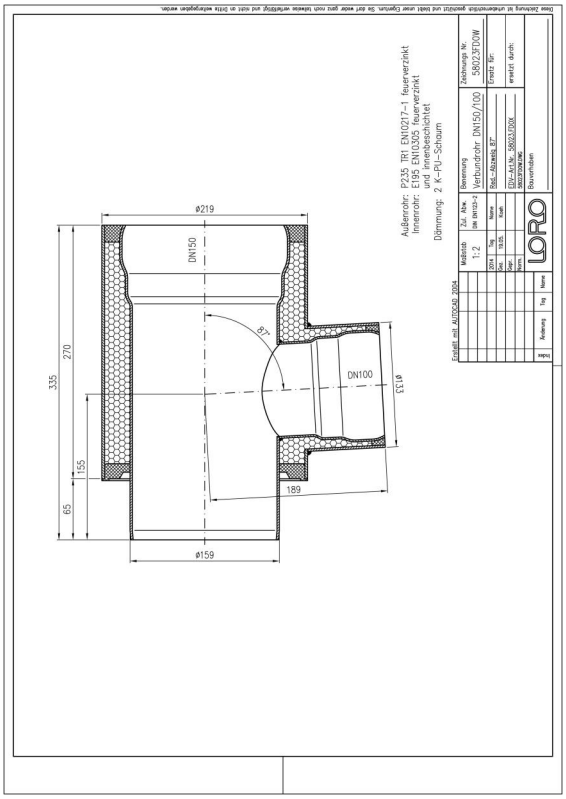

Article information

EAN Code	4038088038123
ETIM Class	EC003025
Nominal diameter	DN 150, DN 100
Nominal length/degree	88
Outside measurements (HxWxL)	219 x 302 x 335 mm
Weight	9,80 Kg (STK)
Product group	3
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Downloads

Alles online

Installation (PDF)
CAD 2D (DXF)
CAD drawing (PDF)
CAD (DWG)
Brochure (PDF)