

LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 40/32

LORO-Composite Pipe Red.branch 45 degrees DN 40/ 32

Text pre výberové konanie

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN40/32




Údaje o artikli

EAN kód	4038088067277
ETIM trieda	EC003025
Menovitý priemer	DN 40, DN 32
Menovitá dĺžka/stupeň	45
Vonkajšie rozmery (VxŠxH)	89 x 198 x 227 mm
Hmotnosť	0,60 Kg (STK)
Skupina produktov	3
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

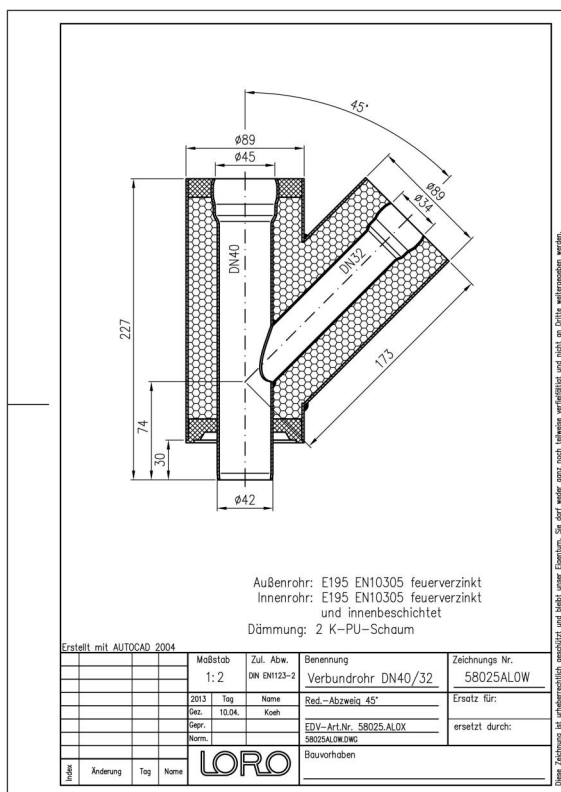

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)