

## LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 50/40

### LORO-Composite Pipe Red.-branch 45 degrees DN 50/40

#### Descriere

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN50/40




#### Date articol

|                               |                             |
|-------------------------------|-----------------------------|
| Cod EAN                       | 4038088049839               |
| Clasă ETIM                    | EC003025                    |
| Diametru nominal              | DN 50, DN 40                |
| Lungime/grad nominal          | 45                          |
| Dimensiuni exterioare (ÎxLxA) | 89 x 198 x 227 mm           |
| Greutate                      | 1,50 Kg (STK)               |
| Grupă de produse              | 3                           |
| Număr tarif vamal             | 73089098                    |
| Material / Culoare            | Stahl feuerverzinkt, Silber |

#### Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

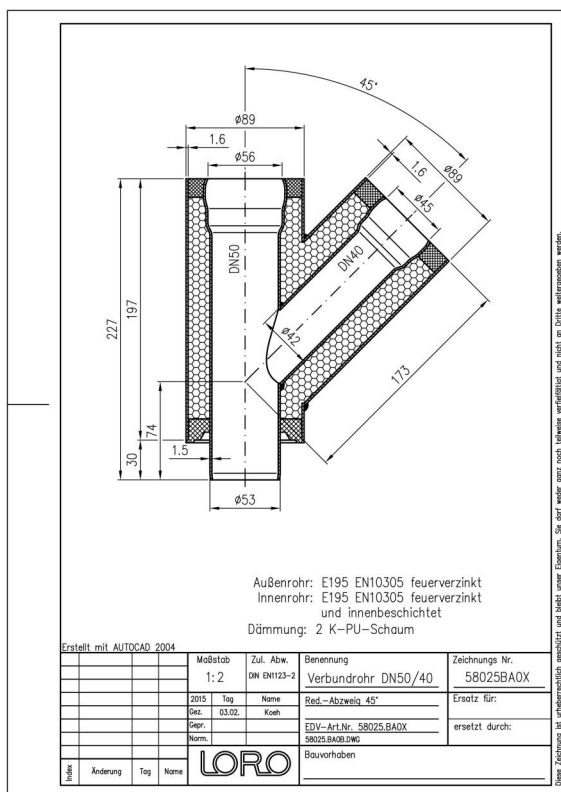

#### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)  
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)