## LORO-VERBUND-RED.-ABZW. 45GR. DN 50/ 32

**LORO-Composite pipe Red. branch 45 degrees DN 50/ 32**

### Text pentru caietul de sarcini

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN50/32

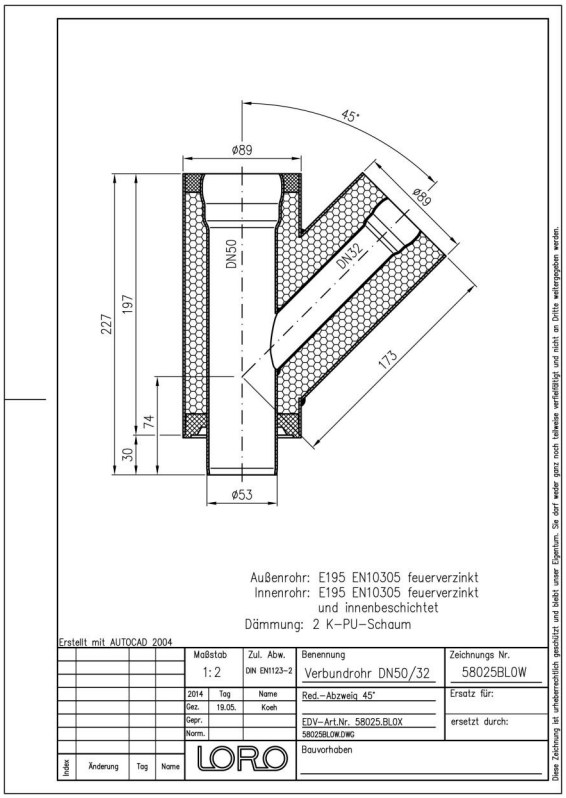


### Date articol

| | |
|---|---|
| **Cod EAN** | **4038088067284** |
| **Clasă ETIM** | **EC003025** |
| **Diametru nominal** | **DN 50, DN 32** |
| **Lungime/grad nominal** | **45** |
| **Greutate** | **1,60 Kg (STK)** |
| **Grupă de produse** | **3** |
| **Număr tarif vamal** | **73089098** |
| **Material / Culoare** | **Stahl feuerverzinkt, Silber** |

### Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

### Descărcări

Alles online

Instrucțiuni de montaj (PDF)
CAD 2D (DXF)
Desen CAD (PDF)
CAD (DWG)
Broșură (PDF)