

LORO-VERBUND-RED.-ABZW. 45GR. DN 50/ 32

LORO-Composite pipe Red. branch 45 degrees DN 50/ 32

Besedilo za popis del

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN50/32




Podatki o izdelku

EAN koda	4038088067284
ETIM razred	EC003025
Nazivni premer	DN 50, DN 32
Nazivna dolžina/stopinja	45
Teža	1,60 Kg (STK)
Skupina izdelkov	3
Carinska tarifna številka	73089098
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

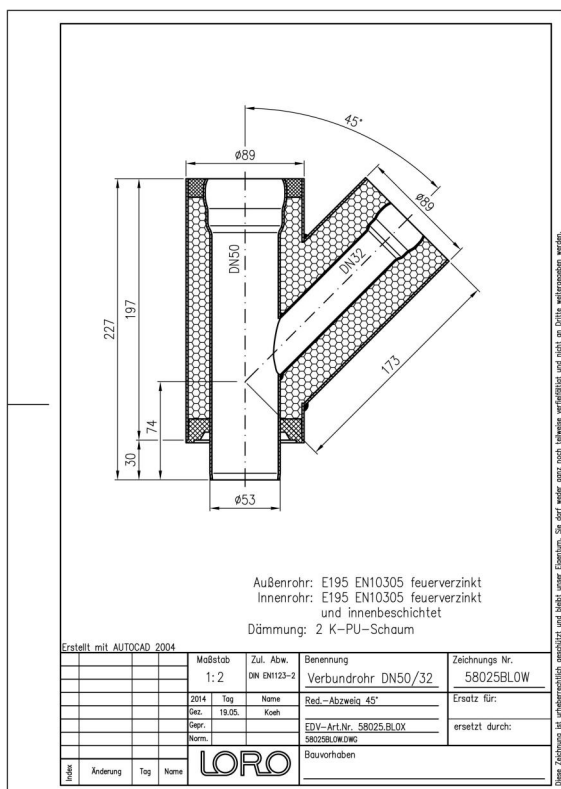

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Merska risba \(PDF\)](#)
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)