LORO-VERBUND-RED.-ABZW. 45GR. DN 50/ 32

LORO-Composite pipe Red. branch 45 degrees DN 50/ 32

Beskrivelsestekst

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN50/32

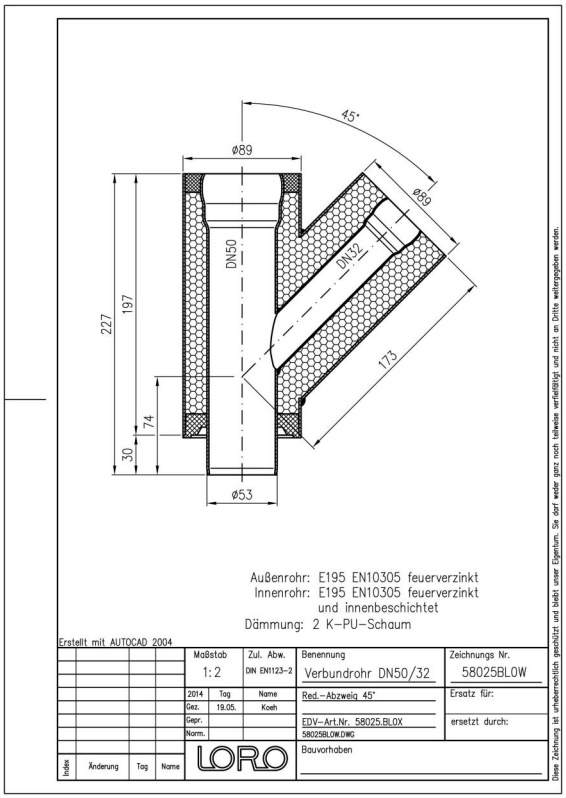

Artikkeldata

EAN-kode	**4038088067284**
ETIM-klasse	**EC003025**
Nominell diameter	**DN 50, DN 32**
Nominell lengde/grad	**45**
Vekt	**1,60 Kg (STK)**
Produktgruppe	**3**
Tolltariffnummer	**73089098**
Materiale / Farge	**Stahl feuerverzinkt, Silber**

Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Nedlastinger

Alles online

Monteringsanvisning (PDF)
CAD 2D (DXF)
Måltegning (PDF)
CAD (DWG)
Brosjyre (PDF)