

## LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 70/40

### LORO-Composite pipe Red.-branch

#### Tarjouspyyntöteksti

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN70/40




#### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088049846               |
| ETIM-luokka          | EC003025                    |
| Nimellishalkaisija   | DN 70, DN 40                |
| Nimellispituus/-aste | 45                          |
| Ulkomitat (KxLxS)    | 102 x 206 x 235 mm          |
| Paino                | 2,50 Kg (STK)               |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73089098                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

#### Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

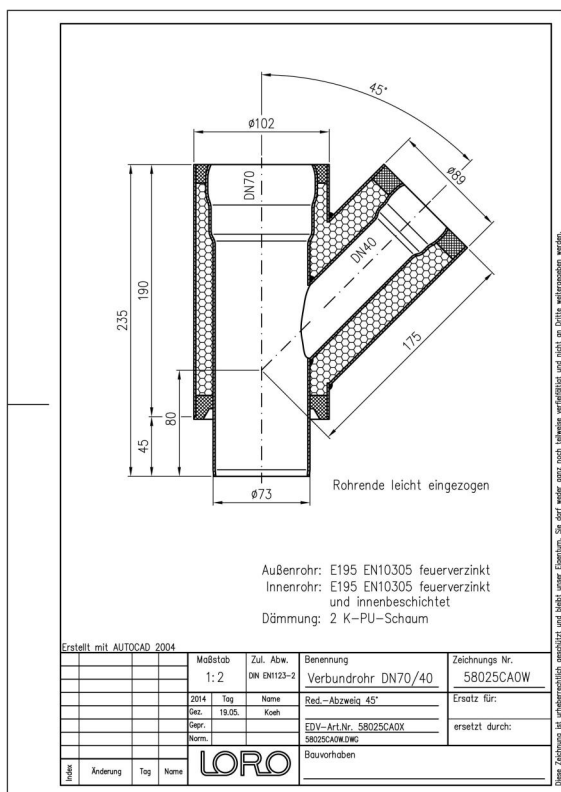

#### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD \(DWG\)](#)

[Esite \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)