


LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 70/40

LORO-Composite pipe Red.-branch

Text pre výberové konanie

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN70/40

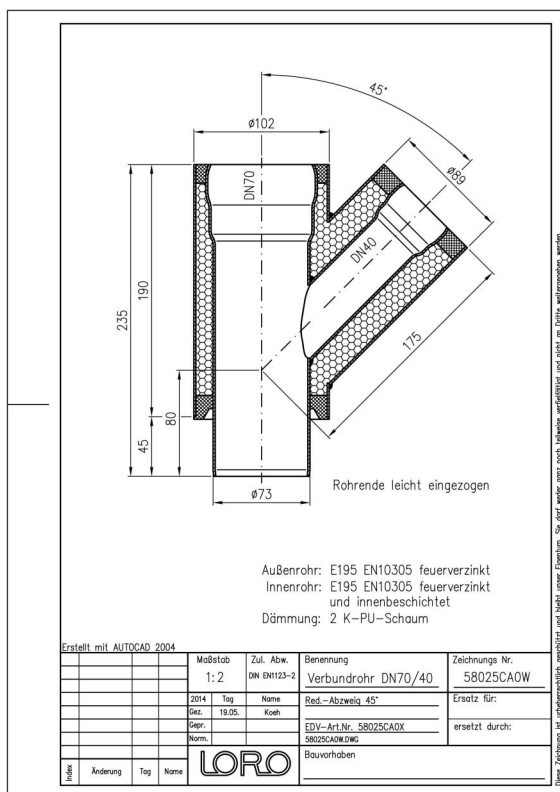

Údaje o artikli

EAN kód	4038088049846
ETIM trieda	EC003025
Menovitý priemer	DN 70, DN 40
Menovitá dĺžka/stupeň	45
Vonkajšie rozmery (VxŠxH)	102 x 206 x 235 mm
Hmotnosť	2,50 Kg (STK)
Skupina produktov	3
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

CAD 2D (DXF)

[Rozmerový výkres \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)

BIM IFC4 (parametrisch)