LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 100/40

LORO-Composite Pipe Red. branch

Description

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN100/40

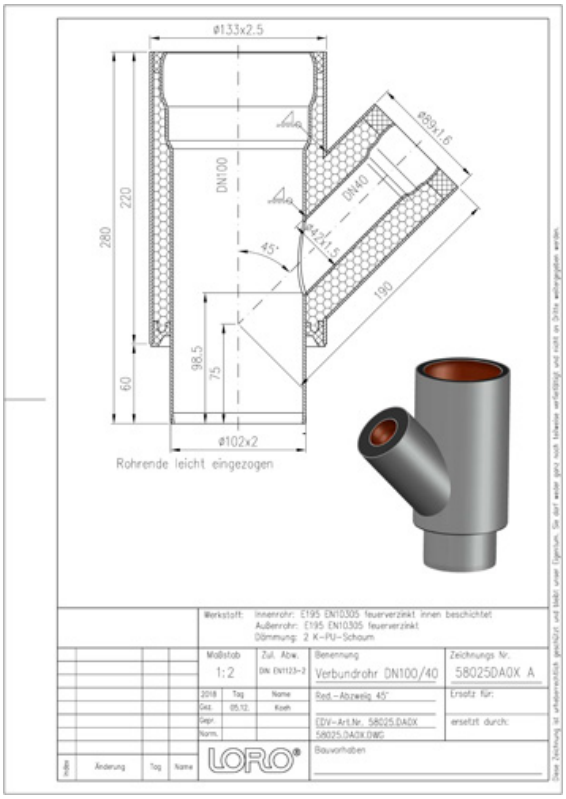

Article information

EAN Code	**4038088049877**
ETIM Class	**EC003025**
Nominal diameter	**DN 100, DN 40**
Nominal length/degree	**45**
Weight	**6,00 Kg (STK)**
Product group	**3**
Customs tariff number	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Usage note

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Downloads

Alles online

- Installation (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- CAD drawing (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)
- Brochure (PDF)
- BIM 3D (STEP)