LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 100/40

LORO-Composite Pipe Red. branch

Tarjouspyyntöteksti

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN100/40

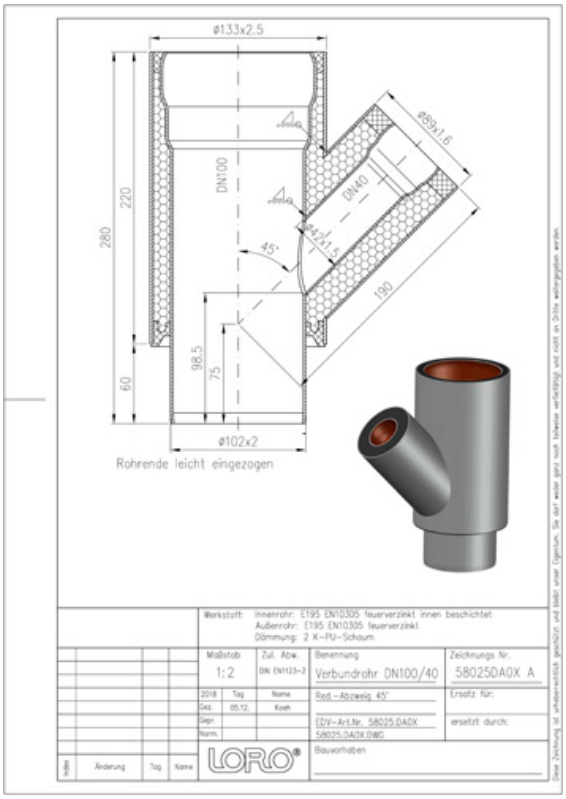

Tuotetiedot

EAN-koodi	4038088049877
ETIM-luokka	EC003025
Nimellishalkaisija	DN 100, DN 40
Nimellispituus/-aste	45
Paino	6,00 Kg (STK)
Tuoteryhmä	3
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Lataukset

Alles online

Asennusohje (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Mittapiirustus (PDF)
CAD 3D (DWG)
BIM 3D (IFC)
Esite (PDF)
BIM 3D (STEP)