# LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 100/40

**LORO-Composite Pipe Red. branch**

## Tekst za troškovnik

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN100/40

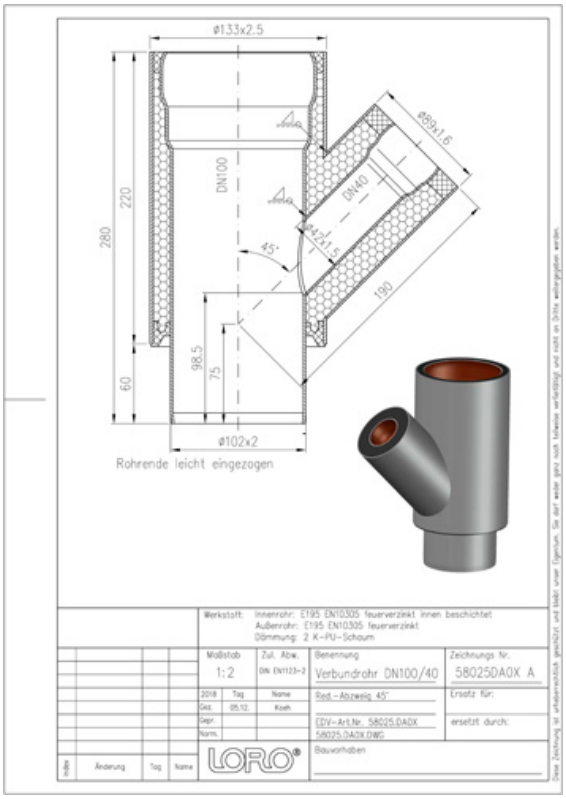


## Podaci o artiklu

| | |
|---|---|
| **EAN kod** | **4038088049877** |
| **ETIM klasa** | **EC003025** |
| **Nazivni promjer** | **DN 100, DN 40** |
| **Nazivna duljina/stupanj** | **45** |
| **Težina** | **6,00 Kg (STK)** |
| **Grupa proizvoda** | **3** |
| **Carinski tarifni broj** | **73089098** |
| **Materijal / Boja** | **Stahl feuerverzinkt, Silber** |

## Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

## Preuzimanja

Alles online

Upute za ugradnju (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Dimenzijski crtež (PDF)
CAD 3D (DWG)
BIM 3D (IFC)
Prospekt (PDF)
BIM 3D (STEP)