LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 125/70

LORO-Composite Pipe Red. branch

Текст за тръжна документация

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN125/70

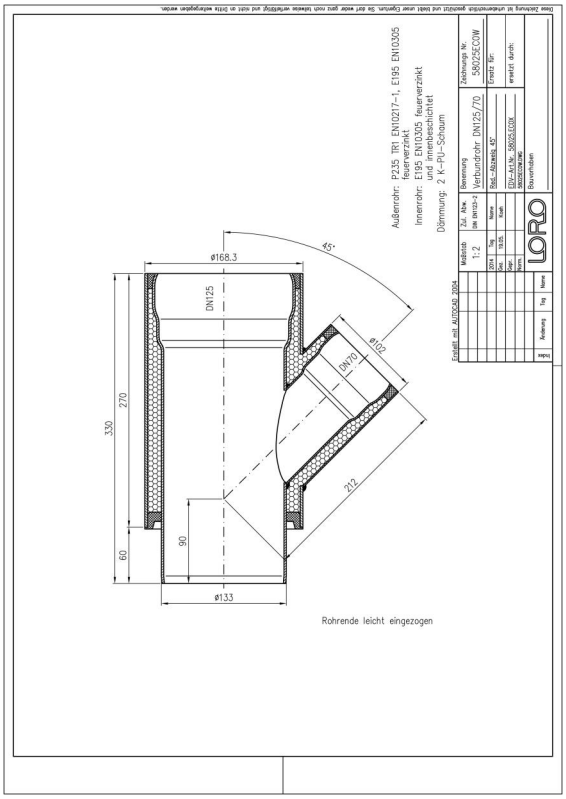

Данни за артикула

EAN код	**4038088049907**
ETIM клас	**EC003025**
Номинален диаметър	**DN 125, DN 70**
Номинална дължина/градус	**45**
Външни размери (ВхШхД)	**168 x 270 x 330 mm**
Тегло	**10,00 Kg (STK)**
Продуктова група	**3**
Митнически тарифен номер	**73089098**
Материал / Цвят	**Stahl feuerverzinkt, Silber**

Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Изтегляния

Alles online

Инструкция за монтаж (PDF)
CAD 2D (DXF)
CAD чертеж (PDF)
CAD (DWG)
Брошура (PDF)
BIM IFC4 (parametrisch)