# LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 125/70

**LORO-Composite Pipe Red. branch**

## Text pro výběrové řízení

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN125/70

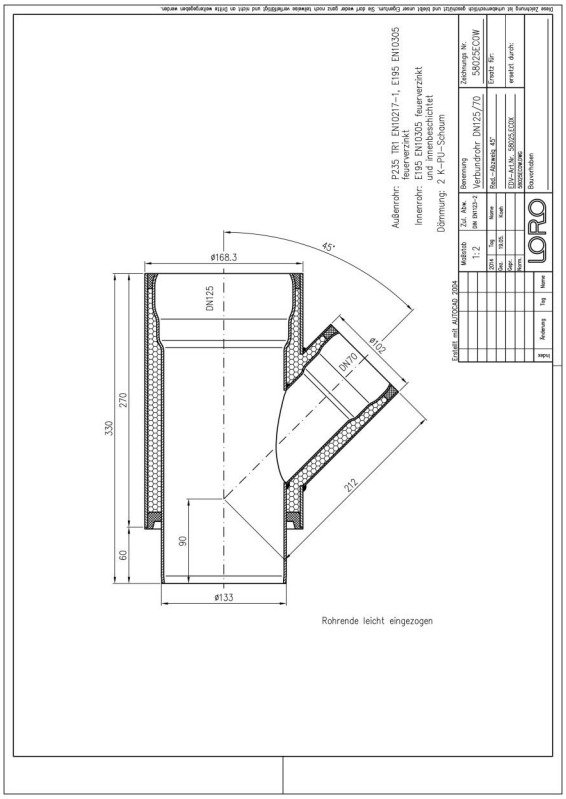


## Údaje o artiklu

| | |
|---|---|
| **EAN kód** | **4038088049907** |
| **ETIM třída** | **EC003025** |
| **Jmenovitý průměr** | **DN 125, DN 70** |
| **Jmenovitá délka/stupeň** | **45** |
| **Vnější rozměry (VxŠxD)** | **168 x 270 x 330 mm** |
| **Hmotnost** | **10,00 Kg (STK)** |
| **Skupina produktů** | **3** |
| **Celní sazebník** | **73089098** |
| **Materiál / Barva** | **Stahl feuerverzinkt, Silber** |

## Pokyny k použití

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

## Ke stažení

Alles online

Návod k instalaci (PDF)
CAD 2D (DXF)
Výkres rozměrů (PDF)
CAD (DWG)
Prospekt (PDF)
BIM IFC4 (parametrisch)