

## LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 125/100

LORO-Composite Pipe Red. branch 45 degrees DN 125/100

### Kuvaus

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN125/100




### Tuotetiedot

|                       |                             |
|-----------------------|-----------------------------|
| EAN-koodi             | 4038088025024               |
| ETIM-luokka           | EC003025                    |
| Nimellishalkaisija    | DN 125, DN 100              |
| Nimellispuiteus/-aste | 45                          |
| Ulkomitat (KxLxS)     | 168 x 305 x 365 mm          |
| Paino                 | 8,50 Kg (STK)               |
| Tuoteryhmä            | 3                           |
| Tullitariffin numero  | 73089098                    |
| Materiaali / Väri     | Stahl feuerverzinkt, Silber |

### Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

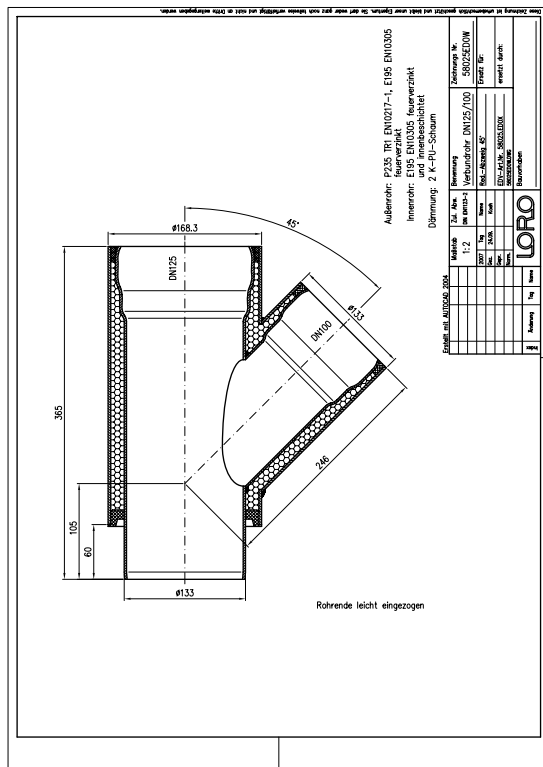

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD \(DWG\)](#)

[Esite \(PDF\)](#)