

LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/70

LORO-Composite Pipe Red.-branch

Beskrivningstext

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150/70




Artikeldata

EAN-kod	4038088049914
ETIM-klass	EC003025
Nominell diameter	DN 150, DN 70
Nominell längd/grad	45
Yttermått (HxBxL)	219 x 338 x 335 mm
Vikt	9,30 Kg (STK)
Produktgrupp	3
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

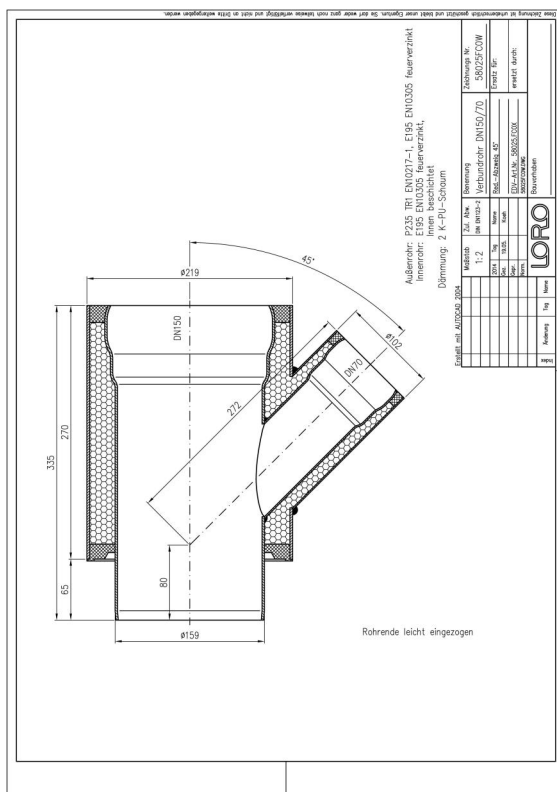

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måttitning \(PDF\)](#)
[CAD \(DWG\)](#)
[Broschyr \(PDF\)](#)
[BIM IFC4 \(parametrisk\)](#)