


LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/70

LORO-Composite Pipe Red.-branch

Text pentru caietul de sarcini

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150/70

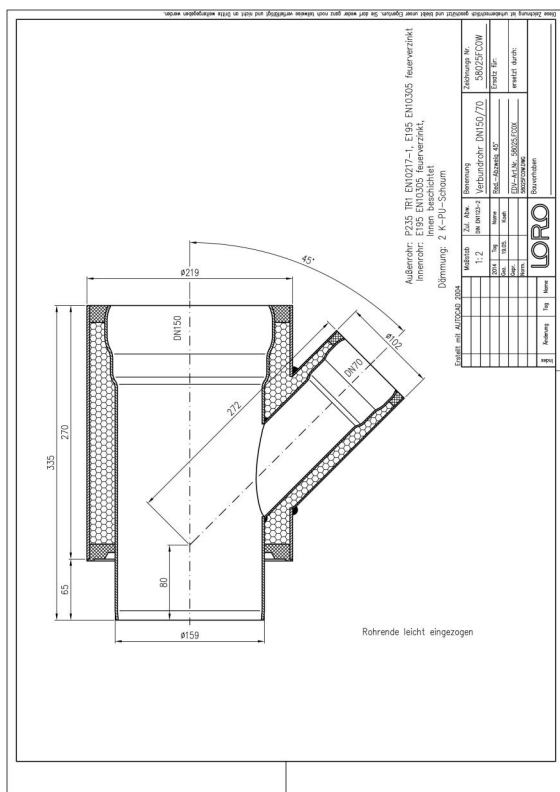

Date articol

Cod EAN	4038088049914
Clasă ETIM	EC003025
Diametru nominal	DN 150, DN 70
Lungime/grad nominal	45
Dimensiuni exterioare (ÎxLxA)	219 x 338 x 335 mm
Greutate	9,30 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)
[BIM IFC4 \(parametrisch\)](#)