# LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/70

**LORO-Composite Pipe Red.-branch**

## Texto para caderno de encargos

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150/70

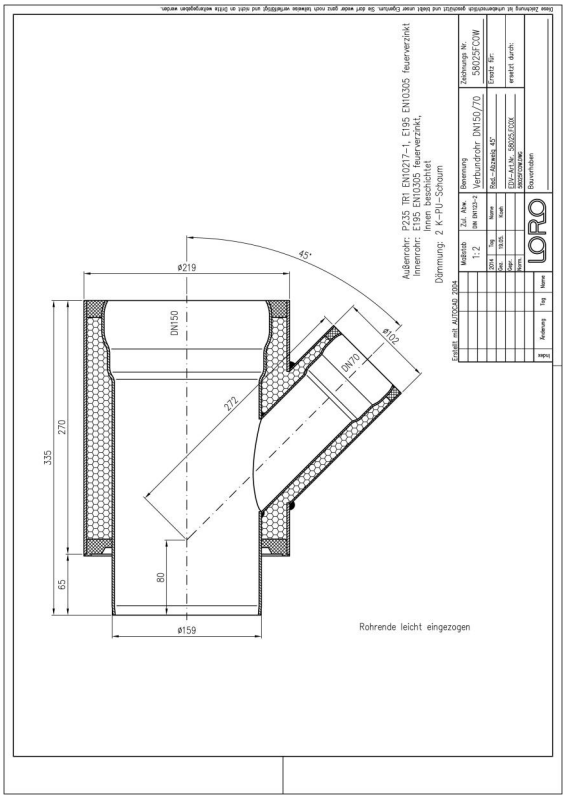


## Dados do artigo

| | |
|---|---|
| **Código EAN** | **4038088049914** |
| **Classe ETIM** | **EC003025** |
| **Diâmetro nominal** | **DN 150, DN 70** |
| **Comprimento/grau nominal** | **45** |
| **Medidas exteriores (AxLxP)** | **219 x 338 x 335 mm** |
| **Peso** | **9,30 Kg (STK)** |
| **Grupo de produtos** | **3** |
| **Número de pauta aduaneira** | **73089098** |
| **Material / Cor** | **Stahl feuerverzinkt, Silber** |

## Nota de utilização

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

## Transferências

Alles online

Instruções de instalação (PDF)
CAD 2D (DXF)
Desenho cotado (PDF)
CAD (DWG)
Brochura (PDF)
BIM IFC4 (parametrisch)