


## LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/70

### LORO-Composite Pipe Red.-branch

#### Voce di capitolato

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150/70

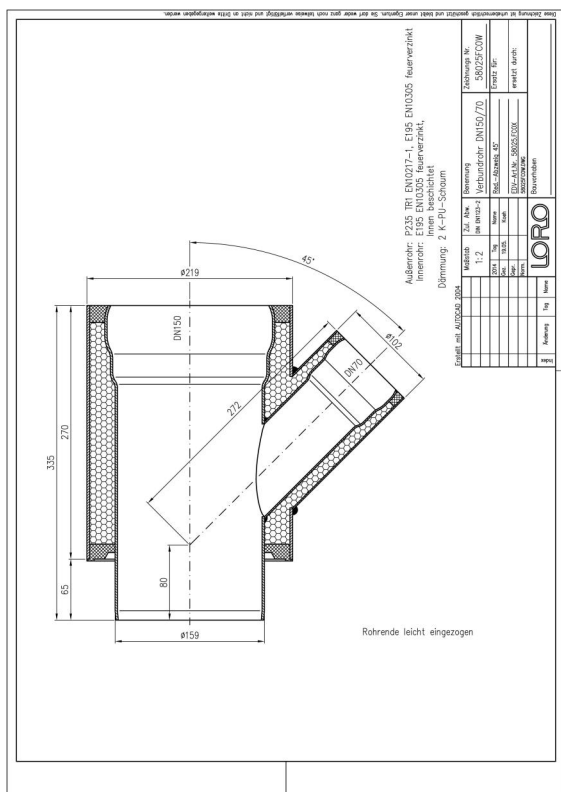

#### Dati articolo

Codice EAN 4038088049914

Classe ETIM EC003025

Diametro nominale DN 150, DN 70

Lunghezza/grado nominale 45

Misure esterne (AxLxP) 219 x 338 x 335 mm

Peso 9,30 Kg (STK)

Gruppo prodotti 3

Numero tariffa doganale 73089098

Materiale / Colore Stahl feuerverzinkt, Silber

#### Note d'uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

#### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(parametrico\)](#)