

## LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/100

### LORO-Composite Pipe Red. branch 45 degrees DN 150/100

#### Beskrivelse

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150/100




#### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kode            | 4038088038178               |
| ETIM Klasse         | EC003025                    |
| Nominel diameter    | DN 150, DN 100              |
| Nominel længde/grad | 45                          |
| Ydermål (HxBxL)     | 219 x 344 x 370 mm          |
| Vægt                | 11,20 Kg (STK)              |
| Produktgruppe       | 3                           |
| Toldtarifnummer     | 73089098                    |
| Materiale / Farve   | Stahl feuerverzinkt, Silber |

#### Brugsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

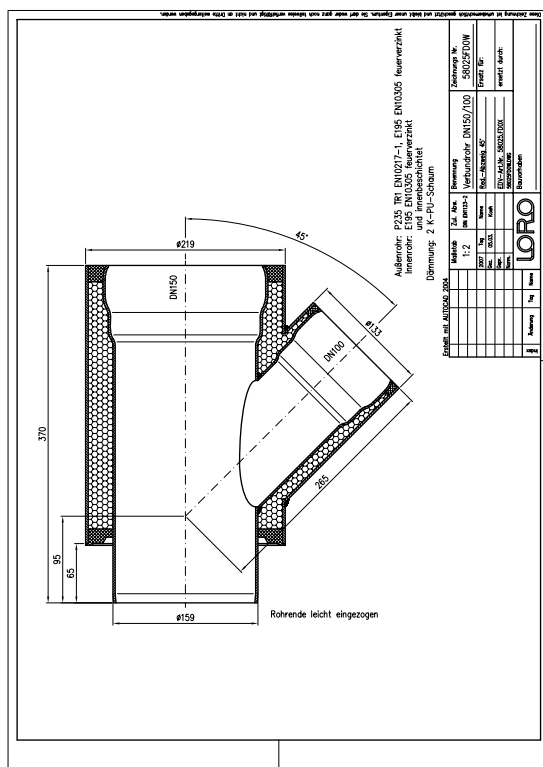

#### Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltegning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)