## LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/125

**LORO-Composite Pipe Red. branch 45 degrees DN 150/125**

### Description

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150/125

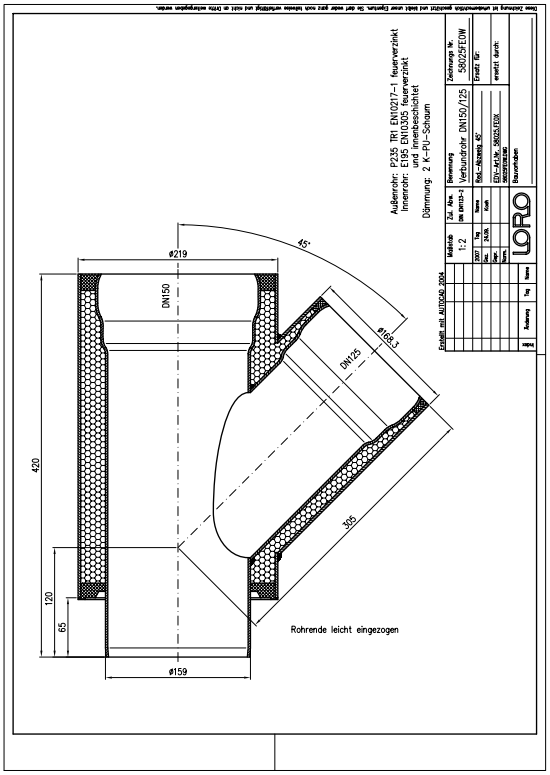


### Article information

| | |
|---|---|
| EAN Code | **4038088032886** |
| ETIM Class | **EC003025** |
| Nominal diameter | **DN 150, DN 125** |
| Nominal length/degree | **45** |
| Outside measurements (HxWxL) | **219 x 385 x 420 mm** |
| Weight | **15,50 Kg (STK)** |
| Product group | **3** |
| Customs tariff number | **73089098** |
| Material / Color | **Stahl feuerverzinkt, Silber** |

### Usage note

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

### Downloads

Alles online

Installation (PDF)
CAD 2D (DXF)
CAD drawing (PDF)
CAD (DWG)
Brochure (PDF)