

LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/125

LORO-Composite Pipe Red. branch 45 degrees DN 150/125

Descrizione

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150/125



Dati articolo

Codice EAN 4038088032886

Classe ETIM EC003025

Diametro nominale DN 150, DN 125

Lunghezza/grado nominale 45

Misure esterne (AxLxP) 219 x 385 x 420 mm

Peso 15,50 Kg (STK)


Gruppo prodotti 3

Numero tariffa doganale 73089098

Materiale / Colore Stahl feuerverzinkt, Silber

Note d'uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

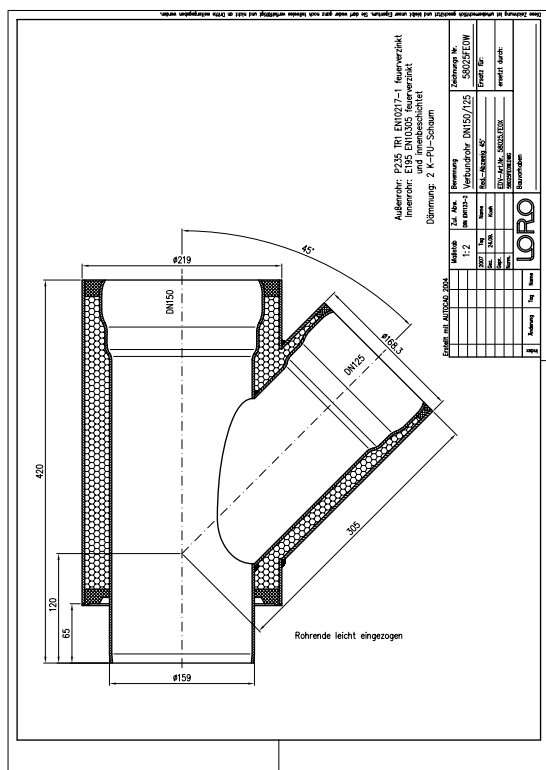

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)