


LORO-X COMPOSITE REDUCED BRANCH 45 DEGREE DN 200/150

LORO-Composite Pipe Red.-branch

Description

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN200/150

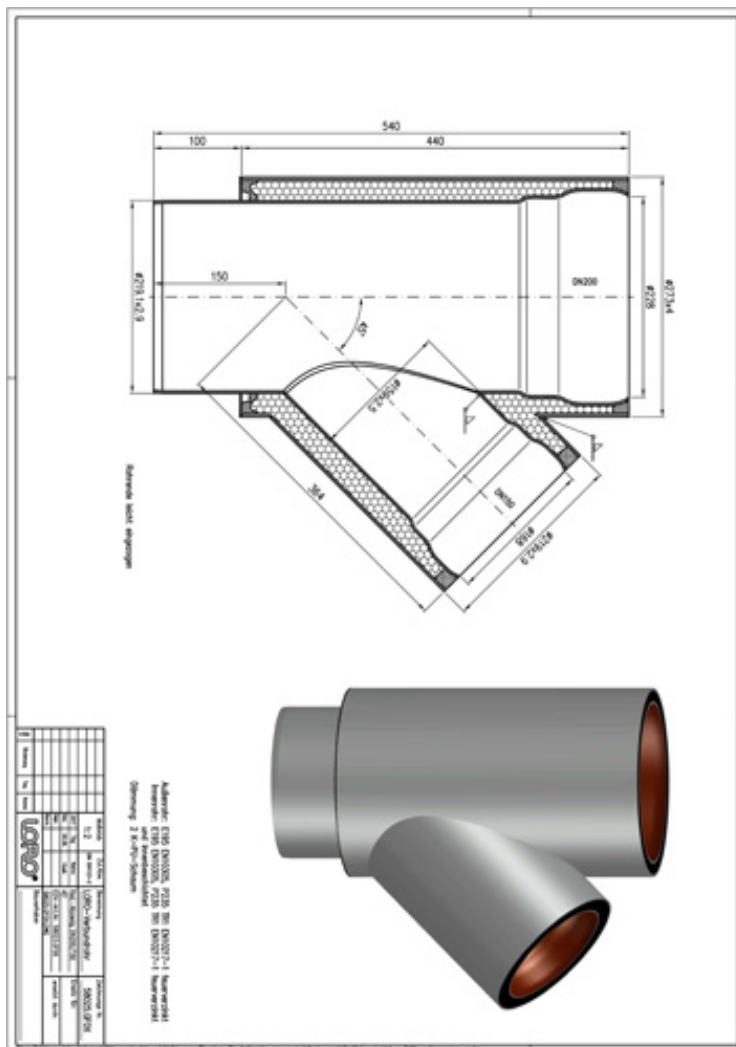

Article information

EAN Code	4038088038208
ETIM Class	EC003025
Nominal diameter	DN 200, DN 150
Nominal length/degree	45
Outside measurements (HxWxL)	273 x 471 x 540 mm
Weight	22,50 Kg (STK)
Product group	3
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Downloads



Alles online

[Installation \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[CAD drawing \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

BIM 3D (STEP)

5th of October