LORO-VERBUNDROHR-RED.-ABZWEIG

LORO-Composite Pipe Red.-branch

Tekst za troškovnik

LORO-X compound pipe reducing branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN 80/50

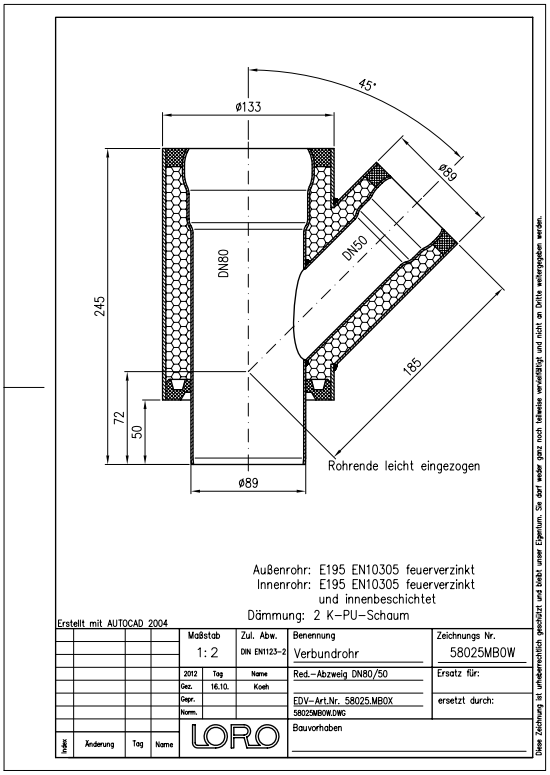

Podaci o artiklu

EAN kod	**4038088049853**
ETIM klasa	**EC003025**
Nazivni promjer	**DN 80, DN 50**
Nazivna duljina/stupanj	**45**
Vanjske mjere (VxŠxD)	**219 x 229 x 245 mm**
Težina	**4,50 Kg (STK)**
Grupa proizvoda	**3**
Carinski tarifni broj	**73089098**
Materijal / Boja	**Stahl feuerverzinkt, Silber**

Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Preuzimanja

Alles online

Upute za ugradnju (PDF)
CAD 2D (DXF)
Dimenzijski crtež (PDF)
CAD (DWG)
Prospekt (PDF)
BIM IFC4 (parametrisch)