

LORO-X COMPOSITE BEND 70 DEGREE DN 80

LORO-Composite Pipe Bend 70 degrees DN 80

Tarjouspyyntöteksti

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 70 degrees, DN 80




Tuotetiedot

EAN-koodi	4038088086407
ETIM-luokka	EC003024
Nimellishalkaisija	DN 80
Nimellispituus/-aste	70
Ulkomitat (KxLxS)	133 x 281 x 305 mm
Paino	3,90 Kg (STK)
Tuoteryhmä	3
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

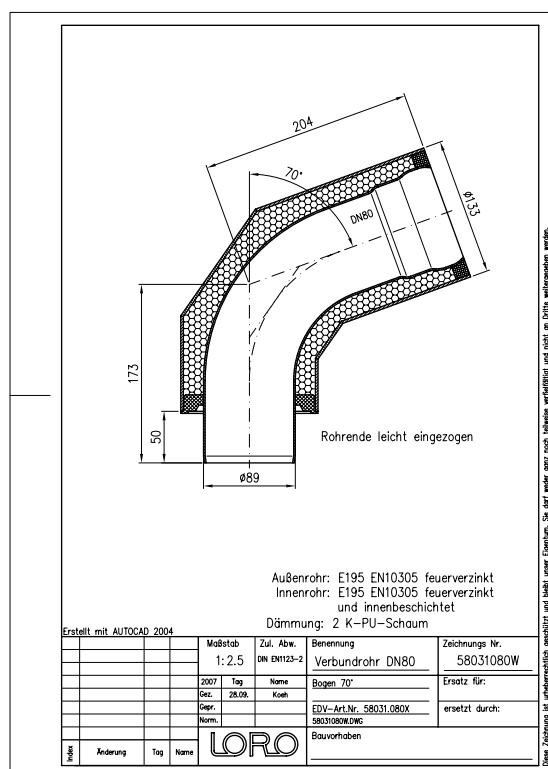

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD \(DWG\)](#)

[Esite \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)