LORO-X COMPOSITE BEND 70 DEGREE DN 80

LORO-Composite Pipe Bend 70 degrees DN 80

Text pre výberové konanie

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 70 degrees, DN 80

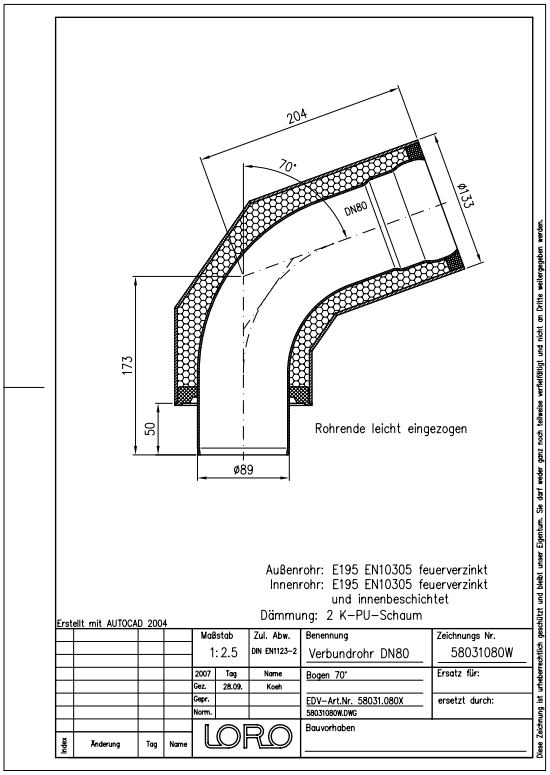

Údaje o artikli

EAN kód	**4038088086407**
ETIM trieda	**EC003024**
Menovitý priemer	**DN 80**
Menovitá dĺžka/stupeň	**70**
Vonkajšie rozmery (VxŠxH)	**133 x 281 x 305 mm**
Hmotnosť	**3,90 Kg (STK)**
Skupina produktov	**3**
Colný sadzobník	**73089098**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Na stiahnutie

Alles online

Návod na montáž (PDF)
Rozmerový výkres (PDF)
Prospekt (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)