LORO-X COMPOSITE BEND 70 DEGREE DN 125

LORO-Composite Pipe Bend 70 degrees DN 125

Popis

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 70 degrees, DN125

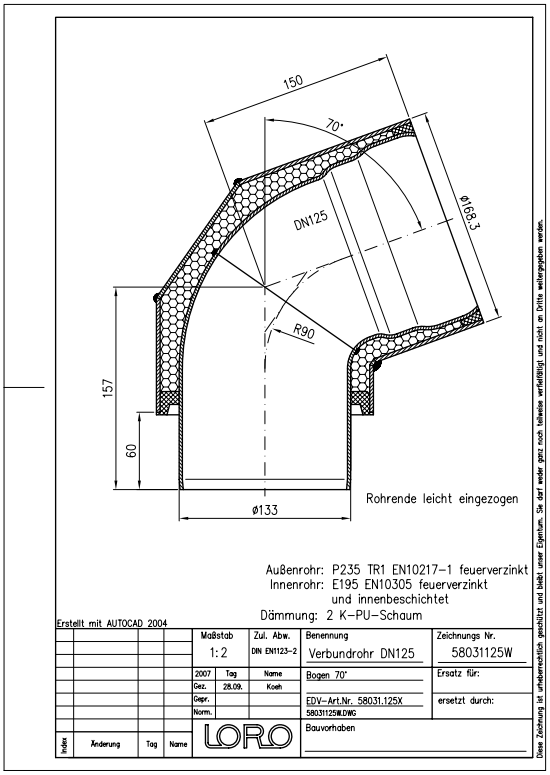

Údaje o artikli

EAN kód	**4038088025116**
ETIM trieda	**EC003024**
Menovitý priemer	**DN 125**
Menovitá dĺžka/stupeň	**70**
Vonkajšie rozmery (VxŠxH)	**168 x 254 x 287 mm**
Hmotnosť	**8,40 Kg (STK)**
Skupina produktov	**3**
Colný sadzobník	**73089098**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Na stiahnutie

Alles online

[Návod na montáž (PDF)](#) [Rozmerový výkres (PDF)](#) [Prospekt (PDF)](#)
[CAD 2D (DXF)](#) [CAD (DWG)](#) [BIM IFC4 (parametrisch)](#)