

LORO-X COMPOSITE BEND 45 DEGREE DN 40

LORO-Composite Pipe Bend 45 degrees DN 40

Beschrijving

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN40




Artikelgegevens

EAN-code	4038088049921
ETIM Klasse	EC003024
Nominale diameter	DN 40
Nominale lengte/graad	45
Buitenafmetingen (HxBxL)	89 x 137 x 178 mm
Gewicht	1,00 Kg (STK)
Productgroep	3
Douanetariefnumme r	73089098
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

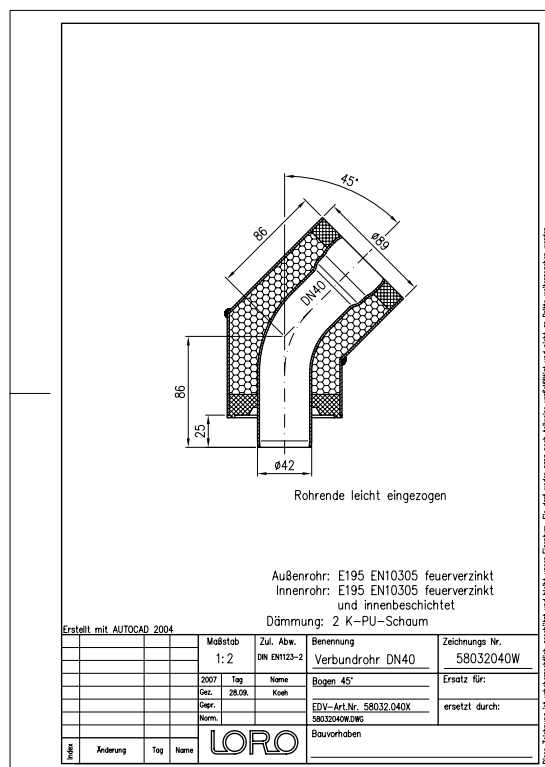

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

CAD 2D (DXF)

[Maattekening \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)

BIM IFC4 (parametrisch)