


## LORO-X COMPOSITE BEND 45 DEGREE DN 125

### LORO-Composite Pipe Elbow 45 degrees DN 125

#### Popis

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN125

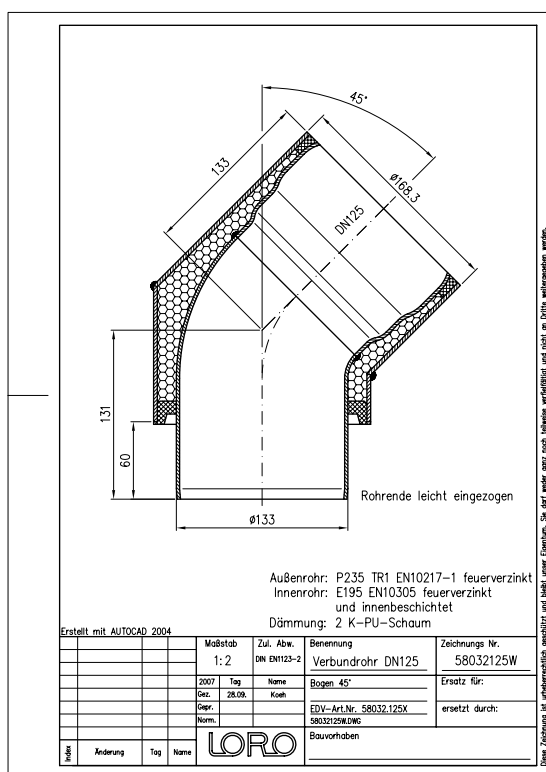

#### Údaje o artikli

|                           |                             |
|---------------------------|-----------------------------|
| EAN kód                   | 4038088025161               |
| ETIM trieda               | EC003024                    |
| Menovitý priemer          | DN 125                      |
| Menovitá dĺžka/stupeň     | 45                          |
| Vonkajšie rozmery (VxŠxH) | 133 x 238 x 285 mm          |
| Hmotnosť                  | 5,00 Kg (STK)               |
| Skupina produktov         | 3                           |
| Colný sadzobník           | 73089098                    |
| Materiál / Farba          | Stahl feuerverzinkt, Silber |

#### Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

#### Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)  
[BIM IFC4 \(parametrisch\)](#)