

## LORO-X COMPOSITE BEND 45 DEGREE DN 150

### LORO-Composite Pipe Elbow 45 degrees DN 150

#### Kuvaus

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN150




#### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088025178               |
| ETIM-luokka          | EC003024                    |
| Nimellishalkaisija   | DN 150                      |
| Nimellispituus/-aste | 45                          |
| Ulkomitat (KxLxS)    | 219 x 297 x 352 mm          |
| Paino                | 8,00 Kg (STK)               |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73089098                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

#### Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

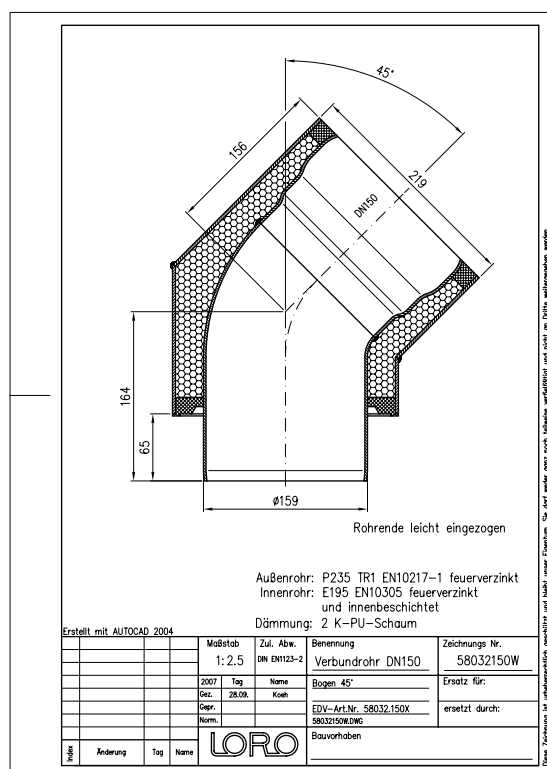

#### Latausset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD \(DWG\)](#)

[Esite \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)