


LORO-VERBUNDROHR BOGEN 30 GR.DN 32

LORO-Composite Pipe Bend 30 degrees DN 32

Beskrivningstext

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN32

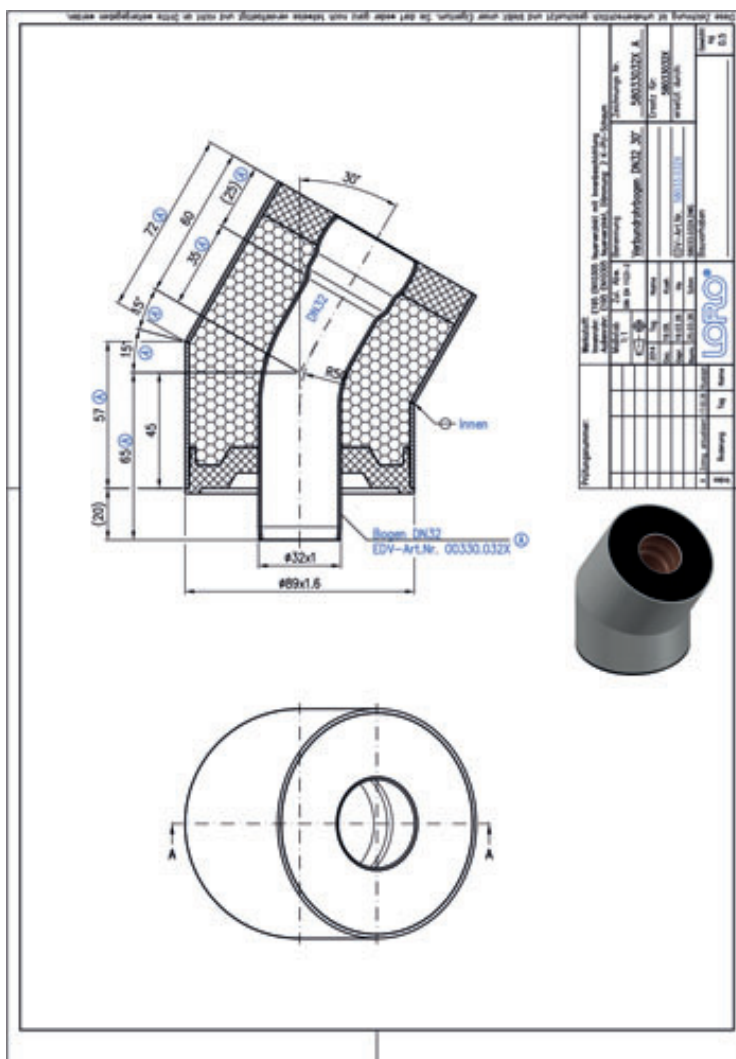

Artikeldata

EAN-kod	4038088094242
ETIM-klass	EC003024
Nominell diameter	DN 32
Nominell längd/grad	30
Yttermått (HxBxL)	89 x 125 x 155 mm
Vikt	0,50 Kg (STK)
Produktgrupp	3
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Måttitning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Broschyr \(PDF\)](#)

[BIM 3D \(STEP\)](#)