LORO-VERBUNDROHR BOGEN 30 GR.DN 32

LORO-Composite Pipe Bend 30 degrees DN 32

Text pentru caietul de sarcini

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN32

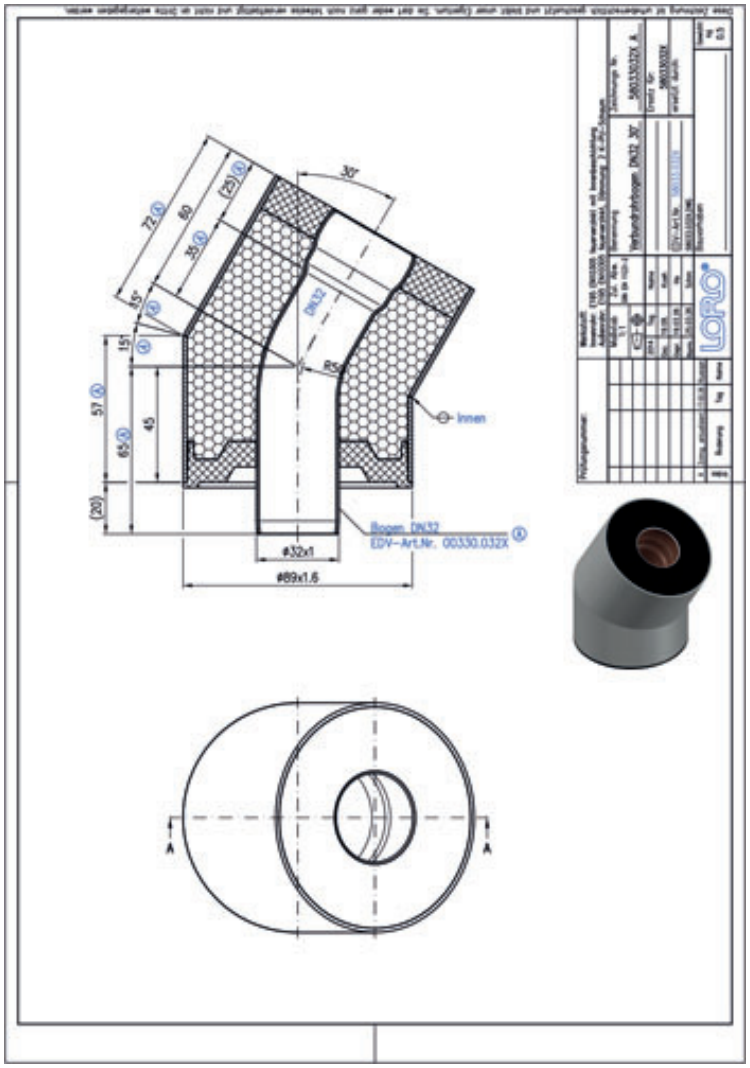

Date articol

Cod EAN	**4038088094242**
Clasă ETIM	**EC003024**
Diametru nominal	**DN 32**
Lungime/grad nominal	**30**
Dimensiuni exterioare (ÎxLxA)	**89 x 125 x 155 mm**
Greutate	**0,50 Kg (STK)**
Grupă de produse	**3**
Număr tarif vamal	**73089098**
Material / Culoare	**Stahl feuerverzinkt, Silber**

Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Descărcări

Alles online

Instrucțiuni de montaj (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Desen CAD (PDF)
CAD 3D (DWG)
BIM 3D (IFC)
Broșură (PDF)
BIM 3D (STEP)