


LORO-VERBUNDROHR BOGEN 30 GR.DN 32

LORO-Composite Pipe Bend 30 degrees DN 32

Text pre výberové konanie

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN32

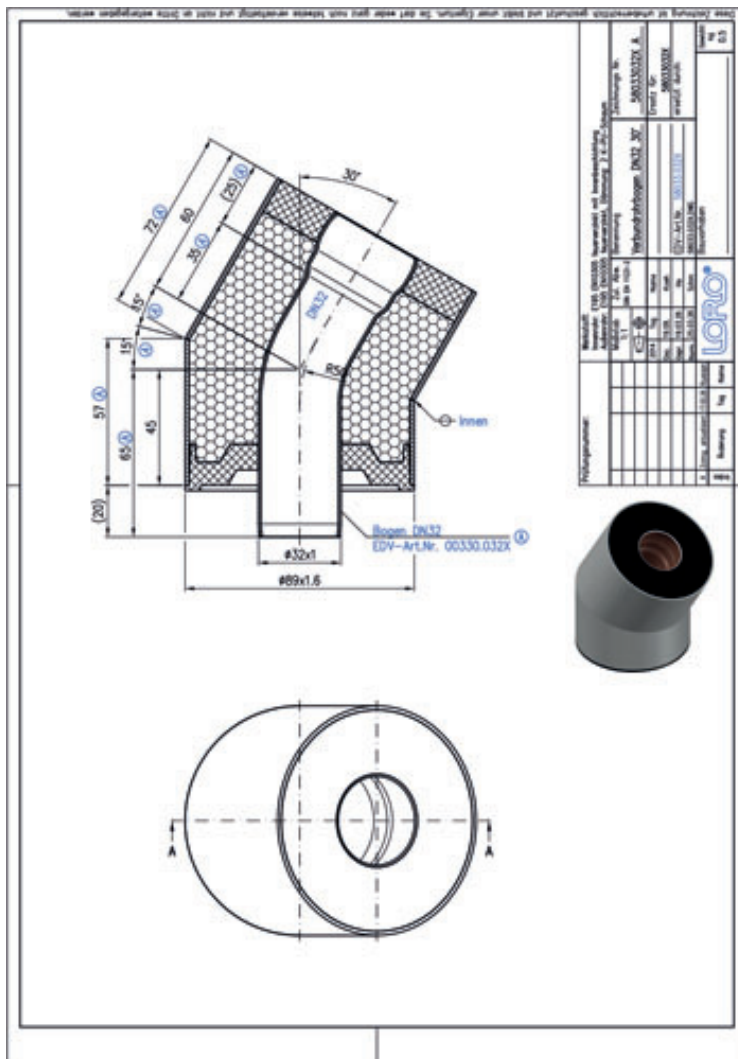

Údaje o artikli

EAN kód	4038088094242
ETIM trieda	EC003024
Menovitý priemer	DN 32
Menovitá dĺžka/stupeň	30
Vonkajšie rozmery (VxŠxH)	89 x 125 x 155 mm
Hmotnosť	0,50 Kg (STK)
Skupina produktov	3
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Rozmerový výkres \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Prospekt \(PDF\)](#)

BIM 3D (STEP)