


## LORO-VERBUNDROHR BOGEN 30 GR.DN 32

## LORO-Composite Pipe Bend 30 degrees DN 32

## Beskrivelsestekst

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN32

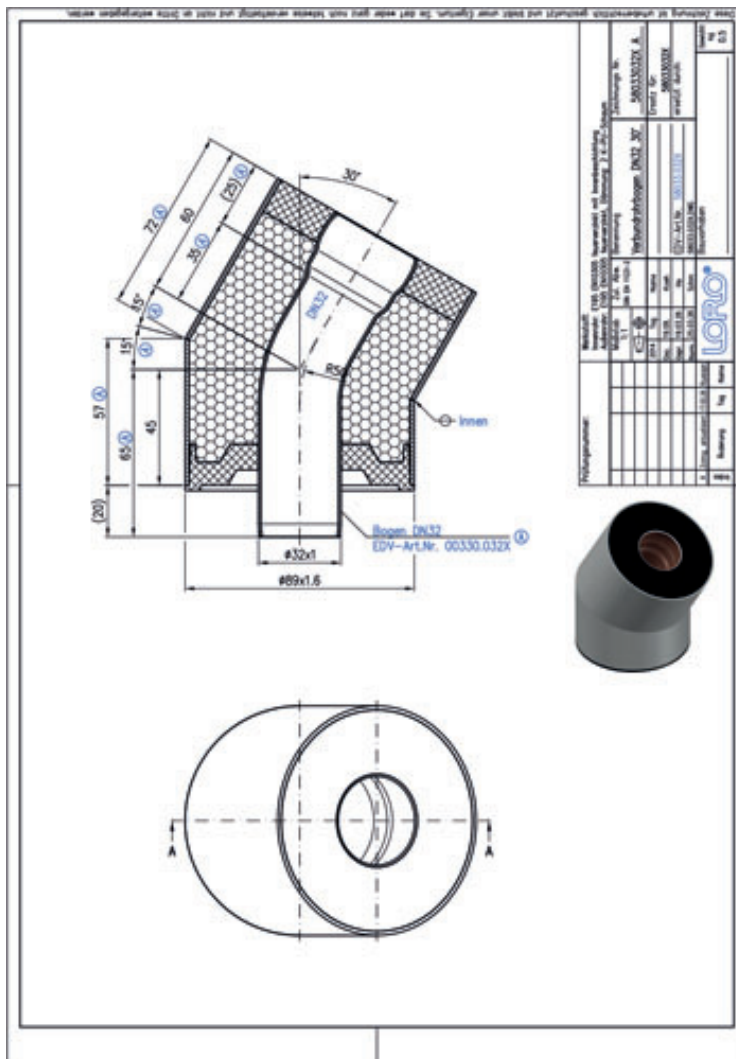

## Artikkeldata

|                          |                             |
|--------------------------|-----------------------------|
| EAN-kode                 | 4038088094242               |
| ETIM-klasse              | EC003024                    |
| Nominell diameter        | DN 32                       |
| Nominell<br>lengde/grad  | 30                          |
| Utvendige mål<br>(HxBxL) | 89 x 125 x 155 mm           |
| Vekt                     | 0,50 Kg (STK)               |
| Produktgruppe            | 3                           |
| Tolltariffnummer         | 73089098                    |
| Materiale / Farge        | Stahl feuerverzinkt, Silber |

## Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

**Nedlastinger**



Alles online

[Monteringsanvisning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Måltegning \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Brosjyre \(PDF\)](#)

### BIM 3D (STEP)