


## LORO-X COMPOSITE BEND 30 DEGREE DN 40

### LORO-Composite Pipe Bend 30 degrees DN 40

#### Popis

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN40

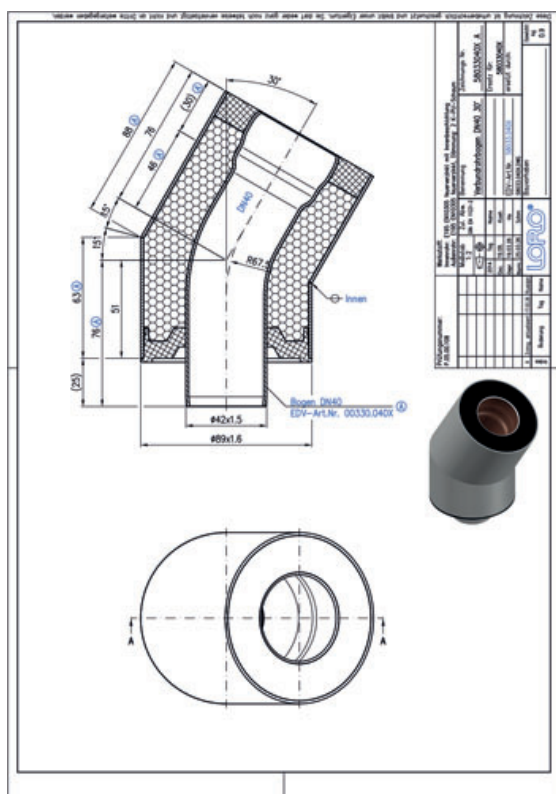

#### Údaje o artiklu

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088050279               |
| ETIM třída             | EC003024                    |
| Jmenovitý průměr       | DN 40                       |
| Jmenovitá délka/stupeň | 30                          |
| Vnější rozměry (VxŠxD) | 89 x 121 x 141 mm           |
| Hmotnost               | 0,90 Kg (STK)               |
| Skupina produktů       | 3                           |
| Celní sazebník         | 73089098                    |
| Materiál / Barva       | Stahl feuerverzinkt, Silber |

#### Pokyny k použití

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

#### Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)  
[CAD 2D \(DXF\)](#)  
[BIM IFC4 \(parametrisch\)](#)

[Výkres rozměrů \(PDF\)](#)  
[CAD 3D \(DWG\)](#)  
[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)  
[BIM 3D \(STEP\)](#)