


LORO-X COMPOSITE BEND 30 DEGREE DN 50

LORO-Composite Pipe Bend 30 degrees DN 50

Описание

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN50

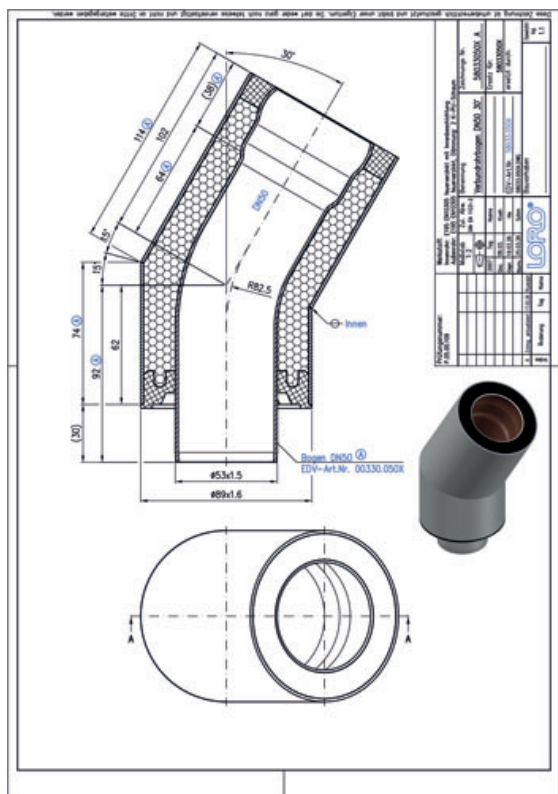

Данни за артикула

ЕАН код	4038088025185
ETIM клас	EC003024
Номинален диаметър	DN 50
Номинална дължина/градус	30
Външни размери (ВхШхД)	89 x 134 x 203 mm
Тегло	1,10 Kg (STK)
Продуктова група	3
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[CAD чертеж \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Брошура \(PDF\)](#)

BIM 3D (STEP)