


## LORO-X COMPOSITE BEND 30 DEGREE DN 50

### LORO-Composite Pipe Bend 30 degrees DN 50

#### Beschrijving

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN50

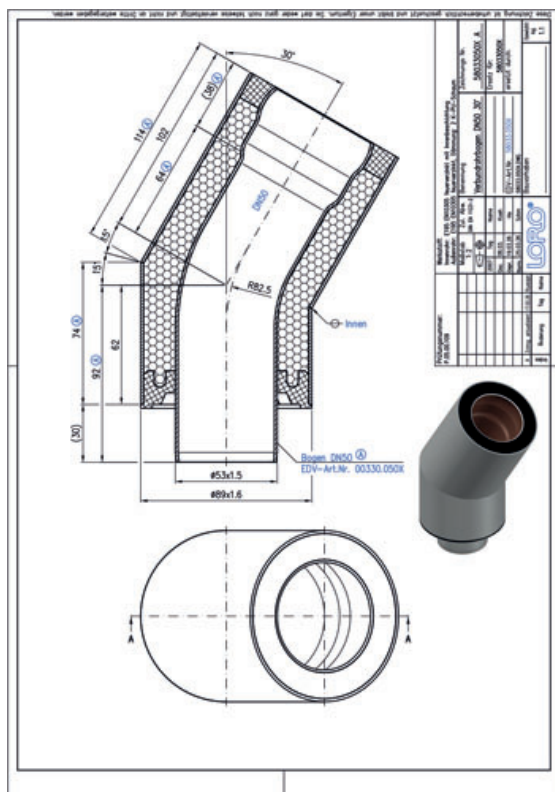

#### Artikelgegevens

|                          |                             |
|--------------------------|-----------------------------|
| EAN-code                 | 4038088025185               |
| ETIM Klasse              | EC003024                    |
| Nominale diameter        | DN 50                       |
| Nominale lengte/graad    | 30                          |
| Buitenafmetingen (HxBxL) | 89 x 134 x 203 mm           |
| Gewicht                  | 1,10 Kg (STK)               |
| Productgroep             | 3                           |
| Douanetariefnumme        | 73089098                    |
| r                        |                             |
| Materiaal / Kleur        | Stahl feuerverzinkt, Silber |

#### Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

#### Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Maattekening \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)