LORO-X COMPOSITE BEND 30 DEGREE DN 50

LORO-Composite Pipe Bend 30 degrees DN 50

Beskrivelse

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN50

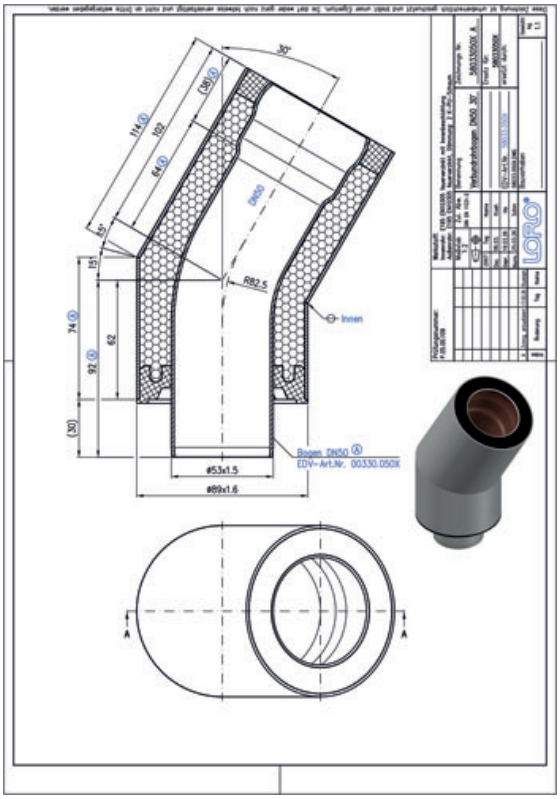

Artikkeldata

EAN-kode	4038088025185
ETIM-klasse	EC003024
Nominell diameter	DN 50
Nominell lengde/grad	30
Utvendige mål (HxBxL)	89 x 134 x 203 mm
Vekt	1,10 Kg (STK)
Produktgruppe	3
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Nedlastinger

Alles online

- Monteringsanvisning (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Måltegning (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)
- Brosjyre (PDF)
- BIM 3D (STEP)