


## LORO-X COMPOSITE BEND 30 DEGREE DN 70

### LORO-Composite Pipe Bend 30 degrees DN 70

#### Description

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN70

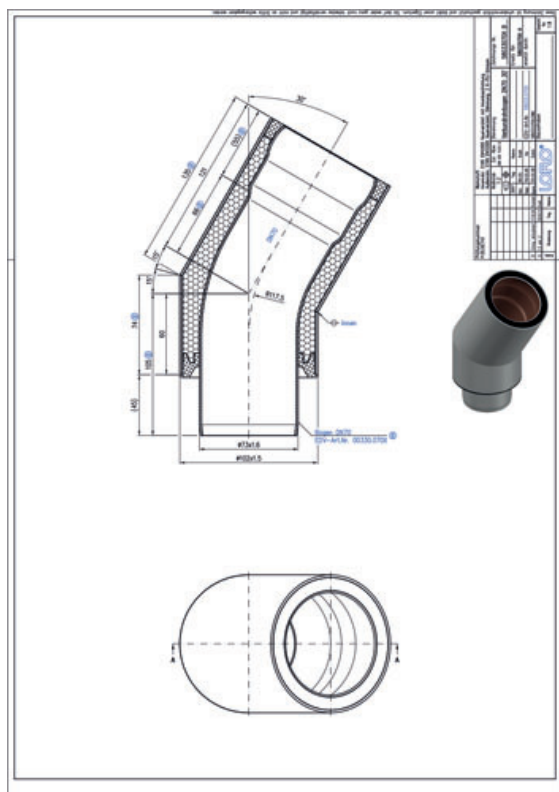

#### Article information

|                              |                             |
|------------------------------|-----------------------------|
| EAN Code                     | 4038088025192               |
| ETIM Class                   | EC003024                    |
| Nominal diameter             | DN 70                       |
| Nominal length/degree        | 30                          |
| Outside measurements (HxWxL) | 102 x 156 x 235 mm          |
| Weight                       | 1,80 Kg (STK)               |
| Product group                | 3                           |
| Customs tariff number        | 73089098                    |
| Material / Color             | Stahl feuerverzinkt, Silber |

#### Usage note

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

#### Downloads



Alles online

[Installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[CAD drawing \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)