


## LORO-X COMPOSITE BEND 30 DEGREE DN 80

LORO-Composite Pipe bend 30 degrees DN 80

### Tarjouspyyntöteksti

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN 80

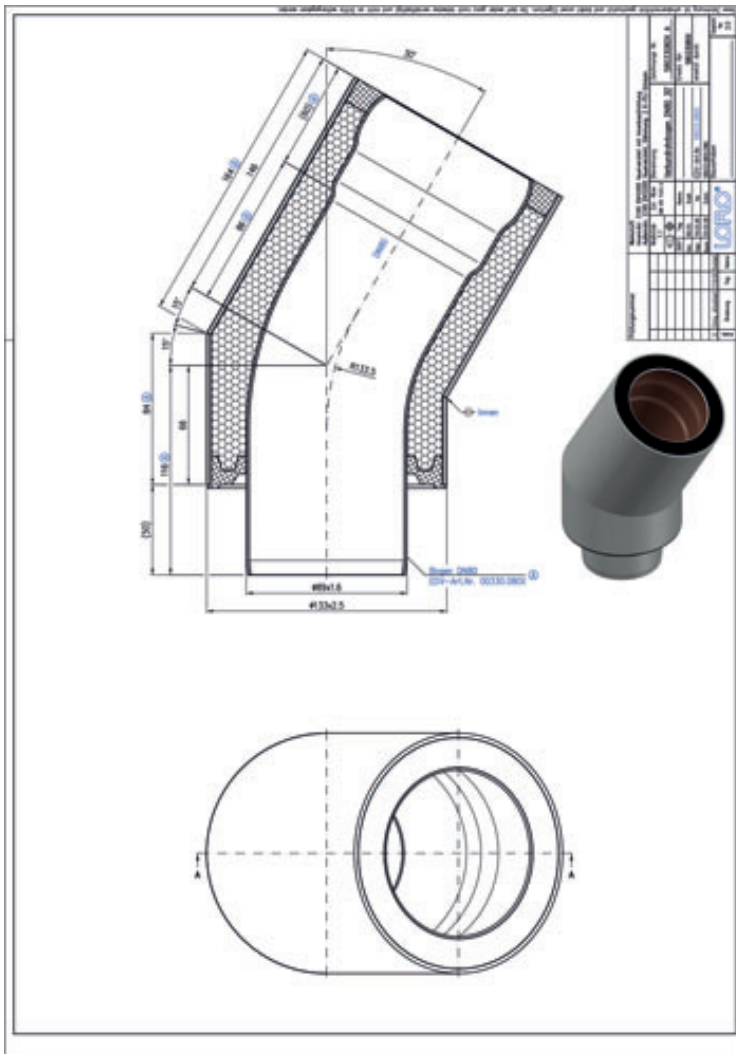

### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088093054               |
| ETIM-luokka          | EC003024                    |
| Nimellishalkaisija   | DN 80                       |
| Nimellispituus/-aste | 30                          |
| Ulkomitat (KxLxS)    | 133 x 197 x 276 mm          |
| Paino                | 3,00 Kg (STK)               |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73089098                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

### Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Esite \(PDF\)](#)

[BIM 3D \(STEP\)](#)