LORO-X COMPOSITE BEND 30 DEGREE DN 80

LORO-Composite Pipe bend 30 degrees DN 80

Tekst za troškovnik

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN 80

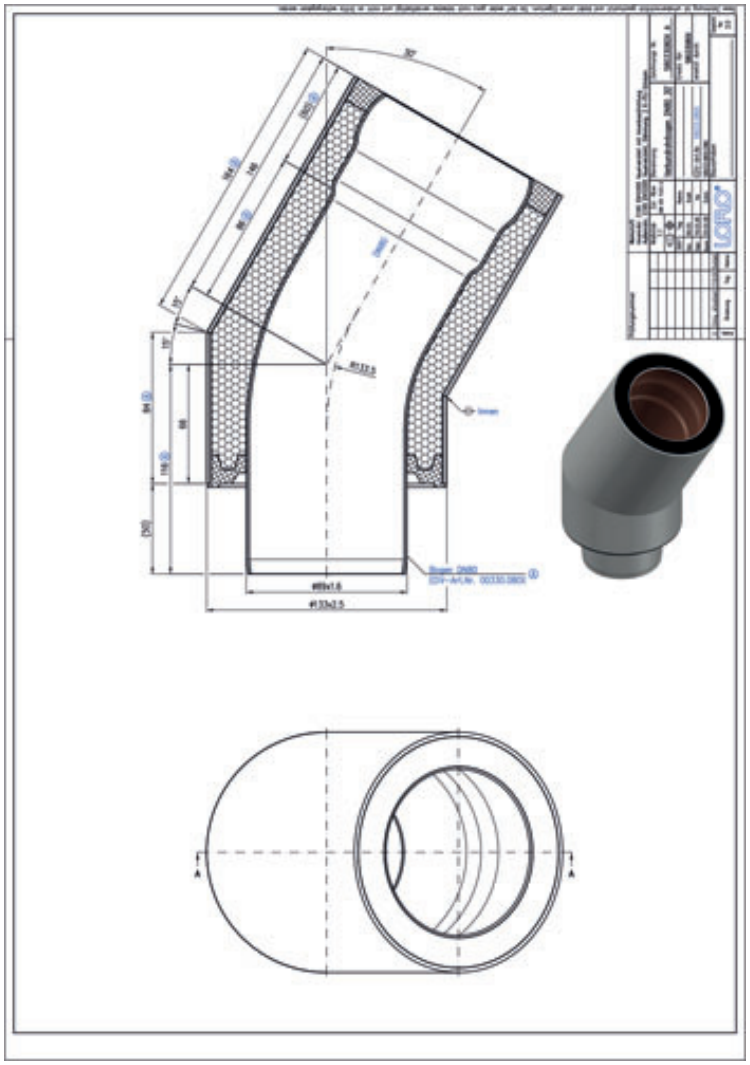

Podaci o artiklu

EAN kod	**4038088093054**
ETIM klasa	**EC003024**
Nazivni promjer	**DN 80**
Nazivna duljina/stupanj	**30**
Vanjske mjere (VxŠxD)	**133 x 197 x 276 mm**
Težina	**3,00 Kg (STK)**
Grupa proizvoda	**3**
Carinski tarifni broj	**73089098**
Materijal / Boja	**Stahl feuerverzinkt, Silber**

Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Preuzimanja

Alles online

Upute za ugradnju (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Dimenzijski crtež (PDF)
CAD 3D (DWG)
BIM 3D (IFC)
Prospekt (PDF)
BIM 3D (STEP)