LORO-X COMPOSITE BEND 30 DEGREE DN 80

LORO-Composite Pipe bend 30 degrees DN 80

Voce di capitolato

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN 80

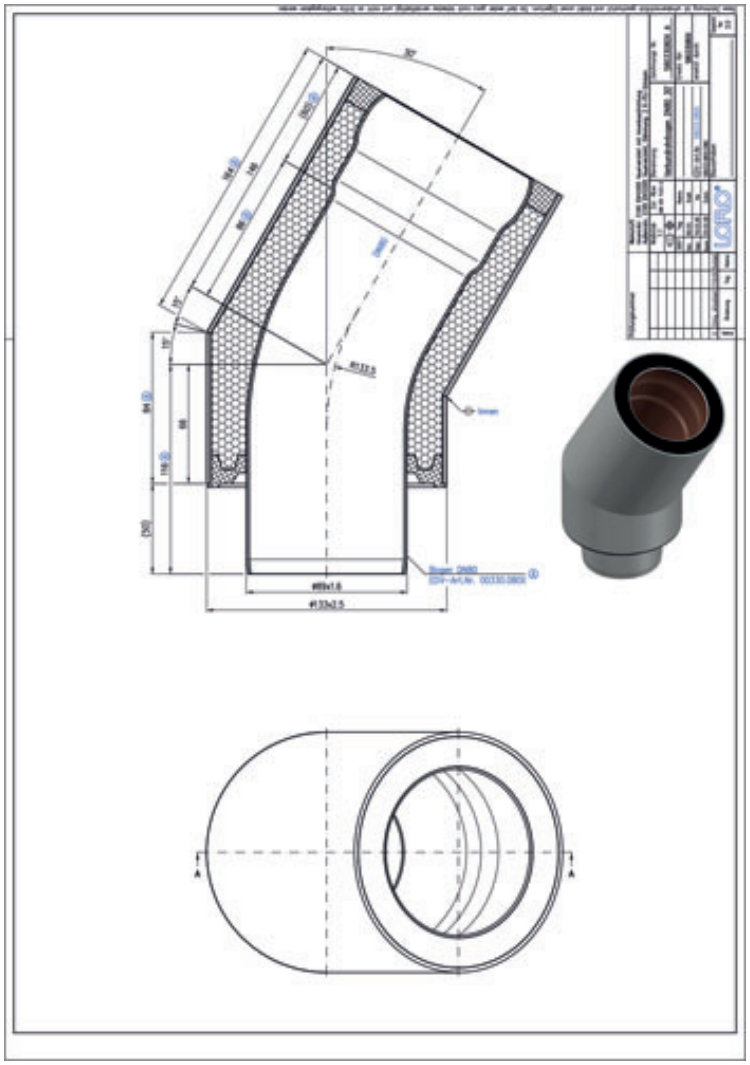

Dati articolo

Codice EAN	**4038088093054**
Classe ETIM	**EC003024**
Diametro nominale	**DN 80**
Lunghezza/grado nominale	**30**
Misure esterne (AxLxP)	**133 x 197 x 276 mm**
Peso	**3,00 Kg (STK)**
Gruppo prodotti	**3**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Download

Alles online

Istruzioni di installazione (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Disegno dimensionale (PDF)
CAD 3D (DWG)
BIM 3D (IFC)
Brochure (PDF)
BIM 3D (STEP)