


## LORO-X COMPOSITE BEND 30 DEGREE DN 125

### LORO-Composite Pipe bend 30 degrees DN 125

#### Descrizione

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 30 degrees, DN125

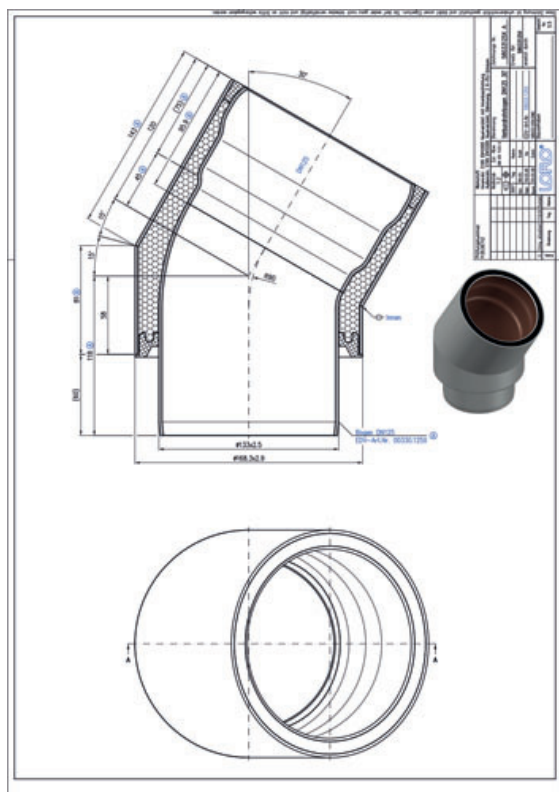

#### Dati articolo

|                          |                             |
|--------------------------|-----------------------------|
| Codice EAN               | 4038088025215               |
| Classe ETIM              | EC003024                    |
| Diametro nominale        | DN 125                      |
| Lunghezza/grado nominale | 30                          |
| Misure esterne (AxLxP)   | 168 x 217 x 264 mm          |
| Peso                     | 5,50 Kg (STK)               |
| Gruppo prodotti          | 3                           |
| Numero tariffa doganale  | 73089098                    |
| Materiale / Colore       | Stahl feuerverzinkt, Silber |

#### Note d'uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

#### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisch\)](#)
[Disegno dimensionale \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)
[Brochure \(PDF\)](#)
[BIM 3D \(STEP\)](#)