

LORO-X COMPOSITE BEND 15 DEGREE DN 70

LORO-Composite Pipe Bend 15 degrees DN 70

Opis

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 15 degrees, DN70




Podaci o artiklu

EAN kod	4038088025246
ETIM klasa	EC003024
Nazivni promjer	DN 70
Nazivna duljina/stupanj	15
Vanjske mjere (VxŠxD)	102 x 127 x 204 mm
Težina	1,60 Kg (STK)
Grupa proizvoda	3
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

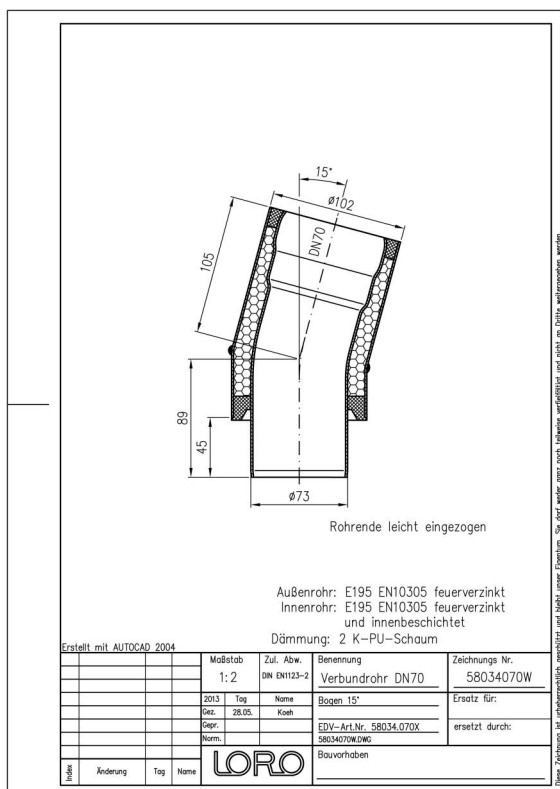

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

CAD 2D (DXF)

[Dimenzijski crtež \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)

BIM IFC4 (parametrisch)